New Toptico Price List

4th Quarter 2012

HK Address: **FLAT/RM A 21/F, GAYLORD COMM BLDG 114-118 LOCKHART RD WANCHAI HK**

Shenzhen Address: **5F North NO1 building,ShangXue Technology Industrial Park, Bantian Area,Shenzhen,China**

Tel: 86-0755-33552752

Email: info@toptico.com



Web: www.toptico.com

New Toptico Unique gift Box

All our product's check and eliminate by Our European Engineer after long and deeply test's

- **18 Month warranty for all Products**
- **day and night Camera with beter performance & Vision.**
- **more then 100 Models price cut down.**
- **New Zoom box Camera.**
- **New best in China Video balun series.**
- **New Top Quality HD-SDI camera.**
- **New Analog Camera Housing and Design**
- **New Effio-P WDR DSP Camera's**

And many other new and best china qualities you can get!!!

About Toptico

Since a High-Tech Enterprise established in 2009, Toptico has developed into one of the leading Supplier, distributors and OEM/ODM service providers of CCTV equipment's, majoring in professional digital security products, intelligence surveillance products and network surveillance products.Toptico has passed ISO9000 standards of quality management system and completed Integration with ERP management system. By the end of year 2010, we have more than 40 staff, 1500m2 factory area, an in-house laboratory, with a 30,000/month production capacity. Main products Have acquired CE/ FCC / CMA certificates.

Being a professional manufacturer of CCTV equipment's, we value Innovation, Dedication, Superiority, and satisfy our customers by adding new designs and Features to our products according to customers' needs. Our MISSION is to make Toptico the pronoun form of professional & best quality of CCTV equipment's.

Why choose Toptico to Cooperate?

1. Toptico cover the widest cctv camera different models with all kinds of chipset to meet your all needs
2. Toptico Control quality from 48hours Aging-test and all material strict selection
3. we use High-quality Tyntek Led and Silicone water-resist ring, easy-installation& bracket.
4. we offer full inspect report to send our customers before shipment, in order to confirm all is 100% perfect
5. Over 10 years Euro engineer and 4 years sales manager offer you best professional service as your Chinese eyes and offer the latest models in the market with competitive price
6. You can transfer money one time to one Acount for all your goods.
7. You get one full PI&PL in one shipment to decrease your local custom troubles and shipment high cost .
8. Each small or big order we only cooperated one honest customer in order to offer best service and help our customers get strong competition.
9. Each long cooperation customers we will offer Toptico full information as one CD, included high resolution camera picture, full, price list & Specification.
10. High efficiency to help you save time and get answers at first time is Toptico another priority.
11. we also accept your flexible other item order which is not showed in our price list.

Toptico Cooperation Term

1.FOB SZ By air Price need to charge 140 USD Extra

2 Sample is available to test quality, add 5 USD/PCS

3.Payment Term: 30%TT+70% Balance before shipment, Western Union is acceptable

Toptico Camera's Model No explanation:

First later TVL : Q=420TVL, W=480TVL, E=520TVL, R=540TVL, Y=600TVL, U=650TVL, I=700TVL, T=1/4"

Second later DSP: R=Sharp, S=Sony, N=NEXT, H=HT Korea(RJ), P=Pixim, E=Effio, A=AVS, WDR=Israeli DSP(Blue-I) / Effio-P

Sample of Toptico Inspect Report Befor Shiping

Toptico Inspect Report

Client：Happy Customer	**Sell to：UK**
Quantity：800pcs	Order Model NO:TO-7701/CD2, TO-3001, TO-3306, TO-8001
Order requirement:With Toptico logo,without power supply.	
PI NO:20110816154	Description of product:IP66,weatherproof medal Dome camera, PTZ, Mini PinHole
Supplier :proved&Visited	Licence Holder:Confirmed
Established Year:2008	Factory：110employees
Certification：CE Fcc Rohs	Aging-test:24-48hours
Order Model NO: TO-3001QS 200pcs ,TO-3004QS 150pcs, TO-3306QS 250pcs ,TO-8001QS 100pcs	
TO-3001QS 2.8MM Silver 200PCS(Serial NO:001/008)	Lot method: each Model NO 20 PCS for normal test
TO-3001QS 2.8mm Gray 200pcs(Serial NO:030/027)	Waterproof for TO-3001QS total test 25pcs
TO-3001QS 3.6mm Silver 200pcs(Serial NO:015/019)	waterproof test for TO-3001QS 6pcs, (2.8MM Gray serial NO: 028/039/034/029/038/027)
TO-3001QS 3.6mm Gray 200pcs(Serial NO:058/055)	TO-3001QS 2.8mm silver, 25pcs (serial NO: 011/003/005/004/013/008)

Problem：	**Solution：**
1、one pcs bracket out of shape	1.recheck all of the goods,and replace them,make sure it is ok.
2. one item TO-3004QS Black color housing not clean	2. already clean and required all must be very clean before packing
3. TO-3306 without adjusting tool for zoom and focus	3. I required them to put inside each item with that tool,already put inside tool
4. waterproof problem: TO-3001QS serial No:015, 2.8mm gray 030 ,glass is broken after testing waterproof	4. broken glass item already changed and tested waterproof again is good

First Check:
DC Diameter:φ5.5*φ2.1*10(mm)
Sticker size: 4mm*3 mm
Sticker with serial No. : **OK**
Cover Material: Metal
Accessories: TO-8001 TO-3001 TO-3306 With screw bag
TO-3004 Without screw bag
Silk-screen/logo:Toptico: good
List for all packing: One camera,one English manual,
one screw bag expect TO-3004QS
Marks With" Made -in -china": **OK**
silica gel :inside camera: **OK**
Date of inspection:Feb,16,2010
Approved by: Lily
Date of issue: Feb,16,2011
Inspection Result : √ **Pass** Fail

Second Check
Inspection result: **OK**
1、logo is right and: **OK**
2、sticks is right: **OK**
3、Menual is correct,
4、menu in English and works: **OK**
6、screen picture clear: **OK**

Inspection Result : √ **Pass** Fail

Date of issue: Dec,26,2011
Approved by: Peter

Toptico Varifocal Lens Bullet IR camera

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-1172IE	1/3" Sony 700TVL CCD&Effio DSP (673+4140)	IP66 weatherproof camera Anti-flare split glass Color: White Weight:2kg DC12V(+/-10%) 3-Axis Integrated bracket Lens: 9-22mm varifocal IR Leds: 4pcs Array Effective IR distance: 100m	12PCS/CTN G.W(KG):16 CTN(CM): 59*44*33	$95.5	$94.5
	TO-1172UE	1/3 Sony CCD&NEXT DSP,650TVL (811+4140)			$86.6	$85.7
	TO-1172QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$67.5	$66.8
	TO-1173IE	1/3" Sony 700TVL Exview Had CCD II&Effio DSP (673+4140)	1/3" Sony Exview HAD II 700TVL 4-9mm varifocal lens Special outside design IR distance: 30m Mechanical IRC 2 Array IR Leds OSD control pad DC 12V Color: White	8pcs/ctn (550*370*470)	$67.2	$66.5
	TO-1114IE	1/3" Sony Supper Had 960H CCD& Effo DSP 700TVL D-WDR; 3-DNR,OSD (811+5148)	IP65 weatherproof camera Anti-flare split glass Color: Silver ,Black Integrated bracket Weight: 1.1kg, DC12V(+/-10%) IR Led: ¢5 *48pcs Effective IR distance: 50m Lens: 5-15mm varifocal Bottom Zoom and Focus Flank OSD menu Mechanical ICR	6PCS/CTN G.W(KG):8 CTN(CM): 46*32*46.5	$93.2	$92.3
	TO-1114YH	1/3" Sony CCD& HT DSP 600TVL(639+RJ9)			$89.9	$89.0
 New 2.8-12mm Lens	TO-1102IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR weatherproof Anti-flare split glass Integrated bracket Color: Silver/ Black/ White Weight: 1.4kg DC12V(+/-10%) IR Led: ¢5 *42pcs Effective IR distance: 35m Lens: 2.8-12 mm Varifocal 9-22mm Lens Add 5$ IR Cut filter add 9$. heater add 7$	12 PCS/CTN G.W(KG):17.5 CTM(CM): 59*39*4	$48.6	$48.1
	TO-1102YN	1/3" Sony CCD&DSP 600TVL (639+Nex2040) OSD			$46.4	$45.9
	TO-1102QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$38.1	$37.7
	TO-1149IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP66 weatherproof camera Anti-flare split glass Color: Cream,Weight:1.9kg/pcs DC12V(+/-10%) IR Led: ¢8 *30pcs 50M Constant-current IR Led Effective IR distance:45m Lens: 6-15mm varifocal Add 3$ to get 9-22mm varifocal (Picture Showed Strong br+4$)	12pcs/ctn G.W(KG):17.5 CTN(CM): 59*44*33	$69.6	$68.9
	TO-1149YN	1/3" Sony CCD&NEXT DSP 600TVL(639+NEXT2040)			$62.5	$61.9
	TO-1149QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$49.3	$48.8
	TO-1166IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP66 weatherproof camera Anti-flare split glass Same color bracket(not included BR) Dimension :230(W) x180(H) x115(D)mm Color: Cream,Weight:2.1kg IR LED: ¢42X4PCS IR LED working distance: 120M Third generation led-array Build-in auto temperature control Lens: 8-20mm Manual Zoom Lens (Picture Showed Strong br+4$)	12pcs/ctn G.W(KG):17.5 CTN(CM): 59*44*33	$75.5	$74.7
	TO-1166YN	1/3"Sony CCD& Nextchip DSP 600TVL (639+2040)			$73.3	$72.5
	TO-1166QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$61.1	$60.4
	TO-1121IE	1/3" Sony CCD&DSP 700TVL (Effio+Exview) Included Mechanical ICR	IP66 weatherproof camera Integrated bracket Color:Silver/Black IR Led: ¢8 *36pcs Effective IR distance: 35m Lens: 9-22/2.8-12mm varifocal 9-22mm Lens +5$ Without ICR Less 4$ IR LED:¢8 *24pcs Less 4$ Weight:0.95kg DC 9-18V		$63.2	$62.5
	TO-1121YRN	1/3" Sharp CCD&DSP 600TVL(2365+2040) OSD			$49.5	$49.0
	TO-1121QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$38.7	$38.4
 New 2.8-12mm Lens	TO-1146IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 weatherproof camera Anti-flare split glass Color: Grey / Silver Weight:1.65 kg DC12V(+/-10%) IR Led: ¢5*72pcs Effective IR distance: 40m Lens: 2.8-12 mm Varifocal 9-22mm Lens Add 5$	22 PCS/CTN G.W(KG):27.8 CTM(CM): 46*65*44	$51.9	$51.4
	TO-1146YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$49.7	$49.2
	TO-1146QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$41.4	$41.0
	TO-1152IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 weatherproof camera Color: gray Weight:1.62kg DC12V(+/-10%) 3-Axis Integrated bracket Built-in video test plug Lens: 2.8-12mm varifocal IR leds: ¢5 *72pcs Effective IR distance: 50m For 9-22mm Lens Add 4.5$ Dimension:295(W)x120(H)x103(D)mm Weight:1.62Kg	12PCS/CTN G.W(KG):16.2 CTN(CM): 62.5*45*39	$53.1	$52.5
	TO-1152YN	1/3"Sony CCD& Nextchip DSP 600TVL(639+NEXT2040)			$50.8	$50.3
	TO-1152QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$42.5	$42.1

	TO-1156IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IR LED: ¢5X36PCS IR LED working distance: 40M Water resistance:IP66 Cable built-in bracket Color: gray/ White Lens:4-9mm Manual Zoom Lens $2 extra for 2.8-12mm Manual Zoom Lens Dimension:228(W) x97(H) x82(D)mm Weight:880g		$47.5	$47.0
	TO-1156YN	Color 1/3" Sony , 600TV DWDR,OSD (639+NEXT2040)			$45.3	$44.8
	TO-1156QS	Color 1/3" SONY, 420 TV Lines Low Illumination			$35.3	$34.9
	TO-1155IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IR LED: ¢8X36PCS IR LED working distance:50M Water resistance:IP66 Cable built-in bracket Lens:4-9mm Manual Zoom Lens $2 extra for 2.8-12mm Manual Lens Dimension:295(W)x120(H) x103(D)mm Weight:1.5kg		$50.8	$50.3
	TO-1155YN	1/3"Sony CCD& Next DSP 600TVL (639+NEXT2040)			$45.3	$44.8
	TO-1155QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$38.6	$38.2
	TO-1119IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Weatherproof Aluminum Housing IR LED: ¢5X42PCS working distance: 40M Built-in IP66 3-Axis bracket, External lens adjusting Lens: 2.8-12mm Manual Zoom Lens $2 extra for 2.8-12mm lens Dimension:228(W)x97(H)x82(D)mm Weight:1.4Kg	12PCS/CTN G.W(KG) :15 CTN(CM): 63x44.5x35	$49.7	$49.2
	TO-1119QS	1/3"Sony CCD& DSP 420TVL (633+3142)			$39.2	$38.8
	TO-1122IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 weatherproof camera Anti-flare split glass 3-Axis Integrated bracket Color: Grey/White DC12V(+/-10%) IR Led: ¢5 *36pcs+ ¢42*2 Effective IR distance:80m Lens:8-20 mm varifocal Dimension:255(W)x144(H)x86(D)mm Weight:2.6Kg	12pcs/ctn G.W(KG):17.5 CTN(CM): 59*44*33	$79.9	$79.1
	TO-1122YRN	1/3" Sharp CCD& Next DSP 600TVL(344+NEXT2040)			$66.6	$65.9
	TO-1122QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$64.4	$63.7
	TO-1161IE	1/3" Sony CCD Exview 700TVL (960H+Effio) OSD	IR weatherproof IP66 camera Anti-flare split glass Integrated bracket Color: Darkgrey/ white Weight: 1.3kg DC12V(+/-10%) IR Led: ¢5 *42pcs Effective IR distance: 35m Lens: 4-9 mm Varifocal 2.8-12/9-22mm Lens Add 3.5/ 6.5$ Dimension:200(W)x100(H)x102(D)mm		$56.1	$55.5
	TO-1161QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$42.2	$41.8
	TO-1162IE	1/3" Sony CCD Exview 700TVL (960H+Effio) OSD	IR weatherproof IP66 camera Anti-flare split glass Integrated bracket Color: Darkgrey/ white Weight: 1.3kg DC12V(+/-10%) IR Led: ¢5 *84pcs Effective IR distance: 40-60m Lens: 4-9 mm Varifocal 2.8-12/9-22mm Lens Add 3.5/ 6.5$		$66.0	$65.4
	TO-1162QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$52.2	$51.6
	TO-1163IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio) OSD	IP67 IR Weatherproof 6-50M Outline Visible Distance LED Constant Current Control 4-9/2.8-12/9-22 Varifocal Lens optional Bulit in Removable IR Cut Filter DC 12V Power Supply OSD MENU Available Heater Built In For Cold Countries Color: White Dimension 269(L)×143(W)×196(H) Weight 1.2Kg	6PCS/CTN G.W(KG):8.4	$79.9	$79.1
	TO-1163HD	1/3'' CMOS HD,600TVL			$64.4	$63.7
	TO-1164IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio) OSD	IP67 IR Weatherproof 72 IR leds 6-50M Outline Visible Distance LED Constant Current Control 4-9/2.8-12/ 9-22 Varifocal lens optional Bulit in Removable IR Cut Filter DC 12V Power Supply OSD MENU Available Heater Built In For Cold Countries Color: White Dimension 269(L)×143(W)×196(H) Weight 1.2Kg	6PCS/CTN G.W(KG):8.4	$73.3	$72.5
	TO-1164HD	1/3'' CMOS HD,600TVL			$57.7	$57.1
	TO-1165IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio) OSD	IP67 IR Weatherproof 6-40M Outline Visible Distance LED Constant Current Control 4-9/2.8-12/ 9-22 Varifocal lens optional Bulit in Removable IR Cut Filter DC 12V Power Supply OSD MENU Available Heater Built In For Cold Countries Color: White Dimension 269(L)×143(W)×196(H) Weight 1.2Kg	6PCS/CTN G.W(KG):8.4	$78.8	$78.0
	TO-1165HD	1/3'' CMOS HD,600TVL			$62.2	$61.5
	TO-1174WDR	1/3" Sony Dual Scan CCD&Effio-P DSP 700TVL(663+41 "Effio-P"	IP65 weatherproof camera Anti-flare split glass Color: Grey+Red Weight:1.9 kg DC12V(+/-10%) IR Led: ¢5*48pcs Effective IR distance: 40m Lens: 2.8-12 mm Varifocal 9-22mm Lens Add 5$	12pcs/ctn G.W(KG):17.5 CTN(CM): 59*44*33	$98.8	$97.8
	TO-1174UE	1/3" Sony CCD& Next DSP 650TVL(639+NEXT2040)			$56.6	$56.0
	TO-11704QSS	1/3" Sony CCD&DSP 420TVL(633+3142)			$41.1	$40.7

Toptico Fix Lens Bullet IR camera

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-1005IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 Weatherproof Anti-glare split glass 3-Axis Integrated bracket Standard Fixed Lens:3.6mm Color: white weight:0.45KG DC12V(+/-10%) IR Led :¢5*24pcs Effective IR distance: 20m	40PCS/CTN G.W(KG):19.5 CTN(CM): 51*39*35	$33.6	$33.3
	TO-1005QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$22.5	$22.3
	TO-1005TQR	1/4" Sharp CCD&DSP 420TVL (2421+38627)			$18.1	$17.9
	TO-1022IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 Weatherproof Anti-glare split glass Standard Fixed Lens:3.6mm Same color bracket,Weight: 0.42kg Color:Black/ White DC12V(+/-10%) IR Led: ¢5*24 pcs Effective IR distance: 20m	40PCS/CTN G.W(KG):19.5 CTN(CM): 47*45*45	$35.5	$35.2
	TO-1022YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$33.3	$33.0
	TO-1022QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$23.3	$23.1
	TO-1026IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 weatherproof camera Anti-flare split glass 3-Axis Integrated bracket Standard Fixed Lens: 3.6mm Color: White DC12V(+/-10%) Weight:0.8kg IR Led: ¢5*24pcs Effective IR distance:25m	40PCS/CTN G.W (KG):16.8 CTN(CM): 58*43*40	$36.4	$36.0
	TO-1026YN	1/3" Sony CCD&NEXT DSP 600TVL(639+NEXT2040)			$34.2	$33.8
	TO-1026QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$25.3	$25.1
	TO-1010IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR Weatherproof Anti-glare split glass Standard Fixed Lens:3.6mm 3-Axis Integrated bracket Color: White, Black Weight: 0.54KG DC12V(+/-10%) IR Led : ¢5*30PCS Effective IR distance: 30m	18PCS/CTN G.W(KG):14 CTN(CM): 53*39*37	$37.7	$37.4
	TO-1010YN	1/3" Sony CCD&Next DSP 600TVL(639+NEXT2040)			$35.5	$35.2
	TO-1010QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$25.5	$25.3
	TO-1010TQR	1/4" Sharp CCD&DSP 420TVL (2421+38627)			$21.1	$20.9
	TO-1025IE	1/3" Sony CCD&DSP 700TVL(Effio+Exview) Included Mechanical ICR	IP65 weatherproof camera Anti-flare split glass 3-Axis Integrated bracket Weight: 0.55 KG DC 9V-18V Color: Silver, Black IR Led: ¢5*30pcs Effective IR distance: 30m Dual Voltage+4USD extra	45PCS/CTN G.W(KG):22 CTN(CM) 58.6*39.2*51.9	$46.5	$46.0
	TO-1025YRN	1/3" Sharp CCD&DSP 600TVL(2365+2040) OSD			$32.2	$31.9
	TO-1025QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$26.1	$25.8
	TO-1028IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR Weatherproof Anti-glare split glass Standard Fixed Lens:3.6mm/6mm 3-Axis Integrated bracket Color: White, Black Weight: 0.54KG DC12V(+/-10%) IR Led : ¢5*36PCS Effective IR distance: 35m	18PCS/CTN G.W(KG):15 CTN(CM): 53*39*37	$43.3	$42.9
	TO-1028YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$41.1	$40.7
	TO-1028QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$26.6	$26.4
	TO-1023IE	1/3" Sony CCD&DSP 700TVL(Effio+Exview) Included Mechanical ICR	IP65 weatherproof camera Anti-flare split glass Color: black,white,silver Integrated bracket Weight: 1.17 KG DC 9V-18V IR Led : ¢8*24PCS Tyntek Fix Lens CS Mount 3.6/6mm Effective IR distance: 35m Add 4.5$ to get ¢8*36PCS	12PCS/CTN G.W(KG):16 CTN(CM) 74.5*32.5*69.5	$56.4	$55.8
	TO-1023YRN	1/3" Sharp CCD&DSP 600TVL(2365+2040) OSD			$42.3	$41.9
	TO-1023QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$36.1	$35.7
	TO-1049IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP66 IR Weatherproof Anti-glare split glass Color: black,white,silver IR Led: ¢8*36PCS Effective IR distance:40m Standard Fixed Lens: 6mm Weight: 1.3 KG DC12V(+/-10%)	9PCS/CTN G.W(KG):12 CTN(CM): 59*44*33	$46.6	$46.2
	TO-1049YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$44.4	$44.0
	TO-1049YR	Color 1/3" SHARP, 600TVL ,OSD(2365+36B15)			$34.4	$34.1
	TO-1049QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$32.2	$31.9
	TO-1030IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR Weatherproof Anti-glare split glass Metal case IR Led: 2pcs*EPLED Lens:F1.2 with 6/8mm Effective IR distance: 40m	30pcs/CTN 70*40*40cm 300g/pcs	$67.2	$66.5
	TO-1030YE	1/3" Sony CCD&DSP 600TVL(Effio-E 4127+639)			$61.9	$61.3
	TO-1030QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$44.4	$44.0

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-1065WDR	1/3 Sony CCD& Effio-P WDR DSP,700TVL (663+4129)	IP65 IR Weatherproof Anti-glare split glass Standard Fixed Lens:3.6/6mm Smart IR Dimension :215(W) x85(H) x78(D)mm Color:Grey Weight:0.9KG DC12V(+/-10%) IR Led :¢5*30PCS Effective IR distance: 30m	25PCS/CTN G.W (KG):20.5 CTN(CM): 53*39*37	$76.0	$75.3
	TO-1065YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$39.6	$39.2
	TO-1066QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$27.5	$27.3
	TO-1048IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR Weatherproof 3-Axis Integrated bracket IR Led : ¢42*1PCS Effective IR distance: 50m Board Lens CS Lens 8mm/F2.0 Color: White Effective IR distance:50m Weight: 1.8 KG		$55.5	$54.9
	TO-1048YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$53.3	$52.7
	TO-1048QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$40.0	$39.6
	TO-1033IE	1/3 Sony CCD& Effio DSP,700TVL (673+4140) Included Mechanical ICR	IP65 weatherproof camera Anti-flare split glass 3-Axis Integrated bracket Weight: 0.55 KG DC 9V-18V Color: Silver/ Black Lens: 3.6/6mm IR Led: ¢8*36pcs Tyntek Effective IR distance: 50m Dual Voltage+4USD extra	12PCS/CTN G.W(KG):17 CTN(CM): 74.5*32.5*69.5	$59.1	$58.5
	TO-1033YRN	1/3" Sharp CCD&DSP 600TVL(2365+2040) OSD			$45.0	$44.5
	TO-1033QS	1/3" Sony CCD 420TVL (633+3142)			$38.7	$38.4
	TO-1016IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR Weatherproof Anti-glare split glass DC12V(+/-10%) Fixed Lens:8mm IR Led :¢8*36PCS Effective IR distance: 50m Color:purple,Silver optional	25 PCS/CTN G.W(KG):17 CTN(CM): 70*40*40	$46.6	$46.2
	TO-1016YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$44.4	$44.0
	TO-1016QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$30.0	$29.7
	TO-1016TQR	1/4" Sharp CCD&DSP 420TVL(2421+38603)			$24.4	$24.2
	TO-1065HD	1/3" CMOS HD 600TVL	IP67 IR Weatherproof 30 Meters Outline Visible Distance LED Constant Current Control 4,6,8,16mm fixed lens(optional) Bulit in Removable IR Cut Filter DC 12V Power Supply Color:Biege Dimension 180(L)×105(W)×1106(H) Weight 0.9Kg		$36.4	$36.0
	TO-1021IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP66 IR Weatherproof Anti-glare split glass weight:1.9KG Standard Fixed Lens: 16mm Color: Ivory/ Black IR Led:¢8*36PCS Super Quality LED, constant Current , use in parking lots Effective IR distance:60m Dimension: 80(L) 114(W)x115(H)mm	12PCS/CTN G.W(KG):23 CTN(CM): 59*44*33	$57.3	$56.7
	TO-1021YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$49.4	$48.9
	TO-1021QS	1/3" Sony CCD&DSP 420TVL (3142+633)			$38.3	$37.9
	TO-1017IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR Weatherproof Anti-glare split glass Standard Fixed Lens:8mm Weight: 1.1KG DC12V(+/-10%) IR Led:¢8*54pcs Effective IR distance:70m	10PCS/CTN G.W(KG):13.5 CTN(CM): 66.5*43*32	$66.6	$65.9
	TO-1017YE	1/3" Sony CCD&DSP 600TVL(Effio-E 4127+639)			$59.9	$59.3
	TO-1017RS	1/3" Sony CCD&DSP 540TVL(Effio-E 4127+639)			$54.8	$54.3
	TO-1017QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$42.7	$42.3
	TO-1019IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP66 IR Weatherproof Anti-glare split glass Weight: 1.18KG DC12V(+/-10%) Standard Fixed Lens:25mm IR Tyntek Led ¢5*49PCS+Φ3*55PCS Effective IR distance:80m With Fan	24pcs/CTN G.W(KG):29.1 CTN(CM): 59*44*33	$62.7	$62.1
	TO-1019YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$54.4	$53.8
	TO-1019QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$29.5	$29.2
	TO-1054IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP66LED weatherproof camera Anti-glare split glass Dimension:280.2*102.4*153.8, Array IR LED,lightning protection at level 2,with cut-proof bracket,CDS auto control12/16mm fixed lens,25mm Mega pixel lens		$59.4	$58.8
	TO-1054YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$50.9	$50.4
	TO-1054QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$38.3	$37.9
	TO-1065IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio) OSD	1/3'' Sony Exview HAD II 4mm board lens 36 IR leds(Φ 5), Visible Distance: 10m DC 12V OSD control pad IP66 Rated Color: White Integrate bracket	18pcs/ctn (55*37*47)	$42.2	$41.8

www.topicc.com

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-1056IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	6/8/12/16mm lens LED: ¢26X4PCS IR LED working distance:70M Third generation led-array P66 Cable Built-in Bracket Dimension :273(W)x100(H)x116(D)mm Weight: 2.5kg		$62.2	$61.5
	TO-1056YE	1/3 SONY SUPER HADII CCD 600TVL(4127+639) OSD			$57.2	$56.6
	TO-1056QS	1/3 SONY CCD 420TVL (3142+633) double board			$40.0	$39.6
	TO-1057IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IP65 IR Weatherproof Anti-glare split glass DC12V(+/-10%) 25mm Fix CS lens 2pcs Array LED IR:100m with bracket		$89.9	$89.0
	TO-1057YN	1/3" Sony CCD&NEXT DSP 600TVL (639+NEXT2040)			$78.6	$77.8
	TO-1057QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$62.8	$62.2
	TO-1059IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	IR LED: ¢42X2PCS IR LED working distance:100M Third generation led-array P66 Cable Built-in Bracket Lens: CS Lens 12mm/F2.0 Dimension :273(W)x100(H)x116(D)mm Weight: 2.5kg		$65.5	$64.8
	TO-1059YR	1/3" Sharp CCD 600TVL (2365+36B15) OSD			$51.1	$50.5
	TO-1059QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$50.0	$49.5
	TO-1060IE	1/3 Sony Exview HAD II 700TVL (960H+Effio-E) OSD	IP66 IR Weatherproof Anti-glare split glass DC12V(+/-10%) Fixed Lens:2.8/3.6/6mm IR Led : ¢5*28PCS Effective IR distance: 20m Color:Black/ White Cable Concealed Bracket Dimension 165(L)×87(W)×92(H) Weight: 0.37kg		$43.3	$42.9
	TO-1060QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$30.0	$29.7
	TO-1061IE	1/3 Sony Exview HAD II 700TVL (960H+Effio-E) OSD	IP66 IR Weatherproof Anti-glare split glass DC12V(+/-10%) Fixed Lens:2.8/3.6/6/8mm IR Led : ¢5*42PCS Effective IR distance:35m Color:Black/ White Cable Concealed Bracket Dimension 250(L)×84(W)×120(H) Weight: 0.82kg		$48.3	$47.8
	TO-1061QS	1/3" Sony CCD&DSP 420TVL(633+3142)			$34.4	$34.1
	TO-1063IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio) OSD	IP67 IR Weatherproof 6-40 Meters Outline Visible Distance LED Constant Current Control 2.8,4,6,8,16mm fixed lens(optional) Bulit in Removable IR Cut Filter DC 12V Power Supply OSD MENU Available Heater Built In For Application of Cold Countries Color: White Dimension 269(L)×143(W)×196(H) Weight 1.2Kg	6PCS/CTN G.W(KG):8.4	$71.0	$70.3
	TO-1063HD	1/3'' CMOS HD,600TVL			$55.5	$54.9
	TO-1064IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio) OSD	IP67 IR Weatherproof 6-55 Meters Outline Visible Distance LED Constant Current Control 2.8,4,6,8,16mm fixed lens(optional) Bulit in Removable IR Cut Filter DC 12V Power Supply OSD MENU Available Heater Built In For Application of Cold Countries Color: White Dimension 269(L)×143(W)×196(H) Weight 1.2Kg	6PCS/CTN G.W(KG):8.4	$72.2	$71.4
	TO-1064HD	1/3'' CMOS HD,600TVL			$56.6	$56.0

Toptico Varifocal Lens Dome camera

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-3309IE	1/3" Sony Supper Had 960H CCD& Effo DSP 700TVL D-WDR; 3-DNR,OSD (811+5148)	3-Axis Vandal-proof varifocal IR dome Color: white/black Weight: 1.4kg Vandalproof Metal case IR Led: ✆5 *18pcs Effective IR distance: 20m 4-9mm varifocal Auto Iris Lens Dual voltage:DC12V/AC24V OSD /IR-CUT Without IR Less 2.5USD	6 PCS/CTN G'W(kg): 9 C'TN(cm): 49*41*29	$53.3	$52.7
	TO-3309YH	1/3" Sony CCD& HT DSP 600TVL(639+RJ8)			$50.0	$49.5
	TO-3320IE	1/3" Sony Supper Had 960H CCD& Effo DSP 700TVL D-WDR; 3-DNR,OSD (811+5148)	IP-66 Weather-Proof /vandal proof Power Input :12V DC/24V AC for option Dimention:170mm(D) *107mm(H) Weight: 1kg OSD / IR-CUT 4-9mm varifocal Auto Iris Lens Effective IR distance:20m Without IR less 3USD 2.8-12MM Auto Iris Lens+10USD 3-axis bracket	20PCS/CTN G'W(kg):16.8 CTN (cm): 49*41.5*29	$57.7	$57.1
	TO-3320UH	1/3" Sony Supper Had 960H CCD& HT DSP 650TVL D-WDR; 3-DNR,OSD (639+RJ9)			$55.5	$54.9
	TO-3320YH	1/3" Sony CCD& HT DSP 600TVL(639+RJ8)			$54.4	$53.8
	TO-3317WDR "Effio-P"	1/3 Sony CCD& Effio-P DSP,700TVL WDR (663+4129)	3- Axis vandalproof IR dome IP65 Weatherproof Color:White Weight:1.2kg DC12V(+/-10%) IR Led: ✆8*21PCS Effective IR distance:20m 4-9mm imported varifocal Lens 3-Axis bracket build in	22PCS/CTN G'W(kg):26.6 C'TN(cm): 59*44*33	$85.5	$83.8
	TO-3317IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)			$54.4	$53.3
	TO-3317YN	1/3" Sony CCD&NEXT DSP 600TVL (639+2040)			$46.3	$45.4
	TO-3317QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$33.6	$33.0
	TO-3322IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	4.5" Metal Weatherproof IR Dome IP66 Weatherproof Color: gray/ silver/White Weight: 1.2kg DC12V(+/-10%) Metal case IR Led: ¢8 *36 pcs Effective IR distance: 30m Standard lens: 9-22mm varifocal		$68.3	$66.9
	TO-3322YN	1/3" Sony CCD&Nextchip DSP 600TVL (639+NEXT2040)			$61.1	$59.8
	TO-3322QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$51.6	$50.6
	TO-3306IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio) OSD	3.5" Metal Weatherproof IR Dome IP65 Weatherproof Color: gray/ silver/ White Weight: 1.2kg DC12V(+/-10%) Metal case IR Led: ✆5 *36 pcs Effective IR distance: 30m Standard lens: 4-9mm varifocal	24 PCS/CTN G'W(kg): 24 CTN (cm): 51.5*39*25	$42.5	$42.1
	TO-3306YN	1/3" Sony CCD& Nextchip DSP 600TVL (639+2040)			$40.3	$39.9
	TO-3306QS	1/3" Sony CCD& DSP 420 TVL(633+3142)			$33.6	$33.0
	TO-3345IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	3.5" Plastic IR Dome Color: Black Weight: 0.5kg Metal case IR Led: ✆5 *30 pcs Effective IR distance:25m Standard lens: 2.8-12mm varifocal Dimension: ¢128 x 97(H)mm	30 PCS/CTN G'W(kg):24 CTN(cm): 59*36*20	$43.3	$42.9
	TO-3345YN	1/3" Sony CCD&Next DSP 600TVL (639+2040)			$40.0	$39.6
	TO-3345QS	1/3" Sony CCD& DSP 420 TVL(633+3142)			$28.9	$28.6
	TO-3318IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	4.5" Plastic IR Dome camera Plastic case IR led:✆5*21pcs Efffective IR distance: 20m 3 Axis bracket built-in Varifocal lens: 2.8-12mm	36PCS/CTN G'W(kg):16 CTN(cm): 51.5*39*37	$45.5	$44.6
	TO-3318YN	1/3" Sony CCD 600TVL (633+Next2040) OSD			$43.3	$42.4
	TO-3318QS	1/3" Sony CCD& DSP 420TVL(633+3142)			$30.0	$29.4
	TO-3331IN	1/3 Sony Super HAD II CCD 700TVL StartLight (960H+Next2170)	Super Low Lux(0.0001 Lux) Color image in Dark Digital WDR; 3D DNR; Sens-up Motion Detection; Privacy Masking OSD Menu Vandalproof Lens: 3.5-8mm		$62.7	$61.5
	TO-3332IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio) OSD	IR weatherproof IP66 Dome camera Anti-flare split glass Color: Dark grey/ white Weight: 0.74kg DC12V(+/-10%) IR Led: ¢5 *42pcs Effective IR distance: 35m Lens: 2.8-12 mm Varifocal Dimension: 120mm(D)×100mm(H) Weight: 0.74kg		$50.5	$50.0
	TO-3332YE	1/3" Sony 600TVL CCD (639+Effio) DSP			$43.8	$43.4
	TO-3332QS	1/3"Sony 420TVL CCD (633+3142 DSP)			$36.6	$36.3

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-3335IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio) OSD	Vandalproof Lens: 2.8-12mm Axis bracket built-in Dimension: ¢142x 100(H) mm Weight: 1.0kg DC12V(+/-10%		$44.2	$43.7
	TO-3335UE	1/3" Sony 650TVL CCD& NEXT DSP (639+NEXT2040)			$42.0	$41.5
	TO-3335QS	1/3"Sony 420TVL CCD&DSP (633+3142)			$32.0	$31.6
	TO-3340IE	1/3" Sony Exview HAD II 700TVL (960H+Effio-E) OSD	Plastic Dome 2.8-11/4-9mm Vari-focal lens 18 IR leds 6-35 Meters Outline Visible Distance LED Constant Current Control Bulit in Removable IR Cut Filter 12V DC Power Supply OSD MENU Available Black/ White Color Avalible 136x109mm(DxH) 430g	12 PCS/CTN G'W(kg):6.3 CTN(cm): 59.3*45.5*21.7	$56.6	$56.0
	TO-3340HD	1/3'' CMOS HD, 600TVL			$41.1	$40.2
	TO-3341IE	1/3" Sony Exview HAD II 700TVL (960H+Effio-E) OSD	Ø5*18pcs IR Led 30M Outline Visible Distance 4-9mm Vari-focal lens LED Constant Current Control Anti-Glare Double Glass Avoid Light Reflection Water Proof IP 67 Built in Removable IR Cut Filter 12V DC Power Supply OSD MENU Available Grey/ White Color Avalible 118x112mm(DxH) 1150g	12 PCS/CTN G'W(kg):15 CTN(cm): 59.3*45.5*21.7	$65.5	$64.2
	TO-3341HD	1/3'' CMOS HD , 600TVL			$50.0	$49.0
	TO-3342IE	1/3'' Sony Exview HAD II, 700TVL (960H+Effio)	4.5" Vandalproof IDome camera Weight:2.7KG Color: White DC12V(+/-10%) 2.8-12mm varifocal Auto Iris Lens Metal case IR Led: ¢5 *36pcs Effective IR distance:40m Bulit in Removable IR Cut Filter Heater Built In For Application of Cold Countries	12PCS/CTN G'W(kg):24 CTN(cm): 51.5*39*37	$75.5	$74.7
	TO-3342HD	1/3" CMOS HD 600TVL			$59.9	$58.7
	TO-3344IE	1/3" Sony Exview HAD II 700TVL (960H+Effio)	4.5" Vandalproof Dome camera Color: White DC12V(+/-10%) 4-9/2.8-12mm varifocal Auto Iris Lens Metal case IR Led: ¢8 *12pcs Effective IR distance:15-20m Dimension: 120mm(D)×95mm(H) Weight: 0.67kg	12pcs/ctn (40*27*27)	$64.4	$63.1
	TO-3344QS	1/3"Sony 420TVL CCD&DSP (633+3142)			$48.8	$47.9
	TO-3346IE	1/3" Sony Exview HAD II 700TVL (960H+Effio)	Plastic Indoor Dome camera Color: White DC12V(+/-10%) 2.8-12mm varifocal Auto Iris Lens Bulit in Removable IR Cut Filter IR Led: ¢5 *30pcs Effective IR distance:30m Dimension: 120mm(D)×95mm(H) Weight: 0.67kg		$51.1	$50.5
	TO-3346HD	1/3'' CMOS HD , 600TVL			$35.5	$35.2

WDR (Wide Dynamic Range) Function Sample Images

WDR off

WDR on

The New Effio-P WDR DSP

SONY Effio™

Toptico Fix Lens Dome camera

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-3011IE	1/3" Sony 700TVL CCD&Effio DSP (673+4140)	WaterProof IP66 Metal VandalProof IR Dome IR Led: ¢5*36pcs Effective IR distance: 30m Standard lens: CS 3.6/ 6/ 8mm Color: White/Black/ Silver/Purple	50PCS/CTN G'W(kg):11.5 CTN(cm): 70*40*40	$43.3	$42.4
	TO-3011YN	1/3" Sony CCD&Next DSP 600TVL(639+NEXT2040)			$38.1	$37.3
	TO-3011QS	1/3" Sony CCD& DSP 420 TVL(633+3142)			$26.0	$25.5
	TO-3017IE	1/3" Sony 700TVL CCD&DSP (673+Effio)	WaterProof IP66 Metal VandalProof IR Dome IR Led: ¢5*48pcs Effective IR distance: 30m Standard lens: CS 3.6/ 6/ 8mm Color: White/Black/ Silver/Purple	24PCS/CTN 51.5*39*25cm	$49.4	$48.4
	TO-3017YN	1/3" Sony CCD&Next DSP 600TVL(639+NEXT2040)			$40.5	$39.7
	TO-3017QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$32.2	$31.5
	TO-3012YN	1/3" Sony CCD&Next DSP 600TVL(639+NEXT2040)	Metal IR dome Color:white IR Led: ¢5:12pcs Effective IR distance: 10m Standard lens: 3.6mm	46PCS/CTN G'W(kg):18.5 CTN(cm): 77*42*29	$43.1	$42.2
	TO-3012QS	1/3" Sony CCD& DSP 420 TVL(633+3142)			$26.5	$26.0
	TO-3001IE	1/3" Sony CCD&Effio DSP 700TVL (673+Effio)	IP65 Weatherproof I dome Color: Grey/ White/ Black Weight:0.65kg/pcs DC12V(+/-10%) Metal case IR Led: ¢5 *24 pcs Efffective IR distance: 20m Standard lens: 3.6/6mm	48 PCS/CTN G'W(kg): 25 CTN (cm): 63x44.5x35	$32.5	$32.2
	TO-3001YN	1/3" Sony CCD& NEXT DSP 600TVL (639+2040)			$30.3	$30.0
	TO-3001QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$21.4	$21.2
	TO-3030IE	1/3" Sony 700TVL CCD&DSP (673+Effio)	Mechanical IRC Dome Size: 2.5" Color:Black, White Weight:0.17kg DC12V(+/-10%) P;astic case IR Led: ¢8 *8 pcs Efffective IR distance: 15m Standard lens: 6mm	30PCS/CTN G'W(kg):14 CTN(cm): 59*36*20	$40.0	$39.6
	TO-3030HD	1/3" CMOS HD 600TVL			$24.4	$24.2
	TO-3013IE	1/3" Sony 700TVL CCD&DSP (673+Effio)	Plastic IR Dome Camera, Color: white,black Weight:0.3kg DC12V(+/-10%) Plastic case IR led: ¢5*30pcs 3 Axis bracket built-in Standard lens: 3.6mm	60 PCS/CTN G'W(kg):14 CTN (cm): 43.2*35*48.2	$34.4	$33.7
	TO-3013YN	1/3" Sony CCD&Next DSP 600TVL(639+NEXT2040)			$32.2	$31.5
	TO-3013QS	1/3" Sony CCD& DSP 420TVL (633+3142)			$22.2	$21.8
	TO-3031IE	1/3" Sony 700TVL CCD&DSP (673+Effio)	Super Mini Vandalproof Dome Color:White Weight:0.35kg DC12V(+/-10%) Metal case IR Led: ¢5*10pcs Effective IR distance: 10m Standard lens: 3.6mm (2.8mm Add+4USD)	72PCS/CTN G'W(kg):25 CTN(cm): 70*40*40	Coming Soon	
	TO-3031YN	1/3" Sony CCD& DSP 600TVL (639+NEXT2040)				
	TO-3031QS	1/3" Sony CCD&DSP 420TVL (633+3142)				
	TO-3004IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Plastic IR Dome camera Color: black, white,grey Weight: 0.37kg DC12V(+/-10%) Plastic case IR led: ¢5*23pcs Efffective IR distance: 20m Standard lens: 3.6mm	60 PCS/CTN G'W(kg):14 CTN (cm): 43.2*35*48.2	$34.5	$33.8
	TO-3004YN	1/3" Sony CCD&Next DSP 600TVL(639+Next2040)			$31.1	$30.5
	TO-3004QS	1/3" Sony CCD& DSP 420TVL (633+3142)			$20.0	$19.6
	TO-3004TQR	1/4"Sharp CCD&DSP 420TVL (2421+38603)			$16.7	$16.3
	TO-3019YH	1/3 SONY HT Korea 600TVL(639+RJ8)	2.8mm fixed Lens 4 IR Leds, 10m IR range,0 Lux(IR ON) 3Axix (Wall / Ceiling / side mounted) Dimension(mm): 100(L)*90(W)*30(H) DC12V Color: White Plastic housing		$43.3	$42.9
	TO-3019YH	1/3" Sharp CCD 600TVL (2365+ RJ8)			$40.0	$39.6
	TO-3020YH	1/3 SONY HT Korea 600TVL(639+RJ8)	3.6/ 2.8mm fixed Lens 4 IR Leds, 10m IR range,0 Lux(IR ON) 3-Axix (Wall / Ceiling / side mounted) Ultrathin- Dimension(mm): 100(L)*90(W)*30(H) DC12V Color: silver Aluminium housing		$46.6	$45.7
	TO-3020YH	1/3" Sharp CCD 600TVL (2365+ RJ8)			$43.3	$42.4
	TO-3027IE	1/3" Sony Exview HAD II 700TVL (960H+Effio)	Vandalproof Dome 4mm board lens, 1 Array IR Led 10-15 Meters Outline Visible Distance LED Constant Current Control 12V DC Power Supply Operation Temperature -10℃ to 45℃ OSD MENU Dimension:118x95mm(LxWxH) Weight:670g DC12V(+/-10%)	12 PCS/CTN G'W(kg):4.8 CTN (cm): 70*40*40	$45.5	$44.6
	TO-3027QS	1/3" Sony CCD& DSP 420TVL (633+3142)			$32.2	$31.5

Pic show	Model No.	Chipset	Spec	Packing	EXW SZ 10-50	EXW SZ 51-100
	TO-2002IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Plastic Dome camera Color: Black Weight:0.33kg DC12V(+/-10%) (w/ Audio add: 2 usd) Plastic case Standard lens: 3.6mm	50 PCS/CTN G'W(kg):16 CTN (cm): 52.8*34.5*47	$33.3	$32.6
	TO-2002YN	1/3 SONY Effio-E 600TVL(639+NEXT2040)			$31.1	$30.5
	TO-2002QS	1/3" Sony CCD 420TVL (633+3142)			$18.9	$18.7
	TO-2002TQR	1/4" Sharp CCD Sharp DSP 420TVL (2421+38627)			$15.0	$14.7
	TO-2004IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Plastic W/O IR Dome camera Color: White Weight:0.35kg DC12V(+/-10%) Plastic case Standard lens: 3.6mm	72 PCS/CTN G'W(kg):25 CTN (cm): 70*40*40	$35.5	$34.8
	TO-2004QS	1/3" Sony CCD& DSP 420TVL (633+3142)			$20.0	$19.6
	TO-2004TQR	1/4" Sharp CCD Sharp DSP 420TVL (2421+38627)			$15.5	$15.2
	TO-2007IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Plastic Dome camera Color: white Plastic case Standard lens: 3.6/ 6mm Weight: 0.2kg DC12V(+/-10%) Operating Temp: -10℃ to 50℃ Dimension: 128mm(D)×85mm(H)	72 PCS/CTN G'W(kg):25 CTN (cm): 70*40*40	$34.4	$34.1
	TO-2007YE	1/3" Sony CCD& NEXT DSP 600TVL (639+2040)			$31.1	$30.8
	TO-2007QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$20.0	$19.8
	TO-3021YH	1/3" Sony Supper Had 600TVL CCD D-WDR; 2-DNR,OSD (639+RJ8)	Indoor camera Size:73*53*88.6mm White color DC12V instal at the corner of wall 2.8mm/3.6mm/6mm fix lens 10 IR range OSD menu inside		$37.7	$37.4
	TO-2008IE	1/3" Sony 700TVL CCD& Effio DSP (673+4140)	Mini vandalproof dome Color: white Standard lens: 3.6mm Weight: 0.2kg DC12V(+/-10%) Operating Temp: -10 to 50℃		$40.0	$39.2
	TO-2008UE	1/3" Sony CCD&Next DSP 650TVL(811+4140)			$36.6	$35.9
	TO-2008QS	1/3" Sony CCD& DSP 420TVL (633+3142)			$23.8	$23.3
	TO-2009IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Engineering Plastic housing 3-Axis lens bracket inside Standard lens: 3.6mm Weight: 0.2kg DC12V(+/-10%) Operating Temp: -10 to 50		$34.4	$33.7
	TO-2009YN	1/3" Sony CCD&Next DSP 600TVL(639+NEXT2040)			$30.0	$29.4
	TO-2009QS	1/3" Sony CCD& DSP 420TVL (633+3142)			$18.6	$18.3

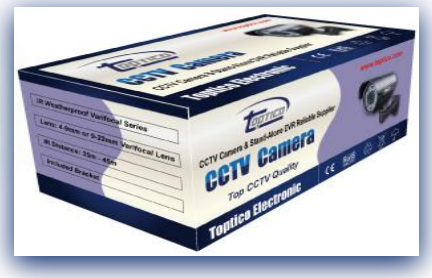

Our New Gift Box Design

Toptico Box camera

Pic show	Model No.	Chipset	Spec	packing	EXW SZ 10-50	EXW SZ 51-100
	TO-4034IN	1/3 Sony Super HAD II CCD 700TVL Starlight (960H+Next2170)	IP 66 Waterproof 4-9mm Auto Iris Super Low Lux(0.0001 Lux) Color image in Dark; Digital WDR 3D DNR; Sens-up X256; Motion Detection Privacy Masking; OSD Menu		$50.0	$49.5
	TO-4013IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	C/CS lens mount 0.01Lux/F1.2, DAY&NIGHT VIDE Switchable DC12V(+/-10%), Max.300mA	36pcs/ctn G.W(kg):15.4KG CTN(CM):53*37*52	$37.7	$37.4
	TO-4013QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$23.3	$23.1
	TO-4011IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	C/CS lens mount 0.01Lux/F1.2, DAY&NIGHT, VIDEO/DC Switchable DC12V(+/-10%), Max.300mA	30pcs/ctn, G.W(kg):13.2 CTN(CM):55*37*29	$37.7	$37.4
	TO-4011QS	1/3" Sony CCD&DSP 420TVL (633+3142)			$20.1	$19.9
	TO-4011TQS	1/4 " Sony CCD&DSP 420TVL (643+3142)			$17.1	$16.9
	TO-4031IN	1/3 Sony Super HAD II CCD 700TVL Starlight (960H+Next2170)	Super Low Lux (0.01 Lux) Color image in Dark; Digital WDR 3D DNR; Sens-up; Motion Detection Privacy Masking; OSD Menu, Dual volt 12VDC+24AC	50pcs/ctn, G.W(kg):20 CTN(CM):54*34*40	$41.6	$41.2
	TO-4032IE	1/3'' Sony Exview HAD II 700TVL (960H+Effio)	With Mechanical ICR, OSD MENU Dual Power (DC12V/AC24V) Min Illumination: 0.1Lux Color 0.001LuxBW S/N Ratio More than 60dB bracket optional Dimension 115(L)x70(W)x62(H) Weight 0.4Kg	12pcs/ctn, G.W(kg):20 CTN(CM):54*34*40	$48.8	$48.4
	TO-4033IE	1/3 Sony Exview HAD II 700TVL CCD(960H+Effio) OSD	New Generation CCD & DSP 700 TVL in color Min. Illumination: Color: 0.1 Lux; B/W 0.01Lux Super Head-Light suppression Digital Noise Reduction OSD Menu , S/N Ratio More than 50dB DC12V& AC24V Power Dimension 115(L)x70(W)x62(H) Weight 0.4Kg	50pcs/ctn, G.W(kg):20 CTN(CM):54*34*40	41.6	$41.2
	TO-4034IEP	1/3'' Sony Exview HAD II 700TVL (663H+Effio-P)	New Effio-P Super Wide Dynamic Range Super Low Lux(0.01 Lux) Color image in Dark 2D+3D DNR Digital Image Stabilizer Motion Detection E-zoom Privacy Masking OSD Menu DC12V& AC24V Power		$73.8	$73.1
	TO-4035IWDR	1/3" Sony CCD II 700TVL (673+AVS03)	Super Wide Dynamic Range New AVS DSP Super Low Lux 0.005Lux Color image in Dark; 3D DNR, Demist, SLR, Sens-up; Digital Image Stabilizer Motion Detection; Privacy Masking OSD Menu	50pcs/ctn, G.W(kg):20 CTN(CM):54*34*40	44.4	44.0

Toptico Zoom camera

Pic show	Model No.	Chipset	Spec	EXW SZ 10-50	EXW SZ 51-100
	TO-Z27	1/4 Sony CCD& Effio DSP,480TVL (643+4140) 0.5Lux	Economic Lens Auto Day/Night Optical 27X Zoom Camera, Fast Auto Focus RS485,Chinese lens:F3.9-117mm IR DC12V(+/-10%) Mechanical IRC option Add +5$ NEW	$43.3	$42.9
	TO-Z27B	1/4 Sony CCD& Effio DSP,650TVL (679+4140) 0.1Lux	D-WDR, OSD Auto Day/Night Optical 27X Zoom Camera, Fast Auto Focus RS485,Chinese lens:F3.9-117mm IR DC12V(+/-10%) Mechanical IRC option Add +5$ NEW	$66.6	$65.9
	TO-Z27A	1/4 Sony CCD& Effio DSP,480TVL (643+4140) 0.5Lux		$53.3	$52.7
	TO-Z27D	1/4 Sony CCD& Effio DSP,650TVL (679+4140) 0.1Lux	D-WDR, OSD Auto Day/Night Optical 27X Zoom Camera, Fast Auto Focus RS485,Chinese lens:F3.9-117mm IR DC12V(+/-10%) Mechanical IRC option Add +5$ NEW	$71.0	$70.3
	TO-Z27C	1/4 Sony CCD& Effio DSP,480TVL (643+4140) 0.5Lux		$53.3	$52.7
	TO-Z23UE	1/3 Sony CCD& Effio DSP,700TVL (673+4140) 0.01Lux	Optical 23X Zoom Camera Auto Day/Night D-WDR, OSD Fast Auto Focus RS485,Chinese lens:F3.9-88mm IR DC12V(+/-10%) Mechanical IRC option Add +5$ NEW	$111.0	$109.9
	TO-Z22B	1/4 Sony CCD& Effio DSP,650TVL (679+4140) 0.1Lux	D-WDR, OSD Auto Day/Night Optical 22X Zoom Camera, Fast Auto Focus RS485,Chinese lens:F3.9-117mm IR DC12V(+/-10%) Mechanical IRC option Add +5$ NEW	$69.4	$68.7
	TO-Z22A	1/4 Sony CCD& Effio DSP,480TVL (643+4140) 0.5Lux		$44.4	$44.0
	TO-Z23U	1/3 Sony CCD& Effio DSP,700TVL (673+4140) 0.01Lux	Optical 23X Zoom Camera Auto Day/Night D-WDR, OSD Fast Auto Focus RS485,Chinese lens:F3.9-88mm IR DC12V(+/-10%) Mechanical IRC option Add +5$ NEW	$105.5	$104.4

Our New Gift Box Design

Toptico PTZ Camera

Pic show	Model No.	Chipset	Spec	EXW SZ 1-20	EXW SZ 21-50
3.8 Inch Mini PT/PTZ Speed Dome Camera					
Outdoor IP66	TO-7303SM10	1/4",Samsung-SDM-100P optic10X D/N. digital 10X. 500TVL,D/N 570TVL Min. Illumination: 0.6 Lux/color, 0.02Lux/D&N	Medium Speed Dome Indoor HOT Diameter of Dome: 3.8" Preset speed:80 Dig/Sec Preset point: 128 points. Tours: 6 programmable(Dwell time/Speed/Preset point).	$256	$254
	TO-7303CN10	1/3" Sony 480TVL , AT-100H Optical 10X . digital 10X 1Lux./typical. 0.1Lux/star light Mode.		$198	$196
outdoor IP66	TO-7306SM10	1/4" Samsung-SDM-100P optic10X D/N. digital 10X. 500TVL,D/N 570TVL Min. Illumination: 0.6 Lux/color, 0.02Lux/D&N pixels: 752(H)X582(V)	High Speed Dome Outdoor Diameter of Dome: 3.8" Preset speed: 300 Deg/Sec Preset point: 128 points. Tours: 6 programmable(Dwell time/Speed/Preset point). Vanda proof: IP66	$272	$269
outdoor IP66	TO-7307SM10	1/4" SONY CCD, Samsung-SDM-100P optic10X D/N. digital 10X. 500TVL,D/N 570TVL 0.6 Lux/color, 0.02Lux/D&N pixels: 752(H)X582(V)	High Speed Dome Outdoor HOT Diameter of Dome: 3.8" Preset speed: 300 Deg/Sec Preset point: 128 points. Tours: 6 programmable(Dwell time/Speed/Preset point). Vanda proof: IP66	$312	$309
outdoor IP66	TO-7308SM10	1/4" Samsung-SDM-100P optic10X D/N. digital10X. 500TVL,D/N 570TVL Min. Illumination: 0.6 Lux/color, 0.02Lux/D&N	High Speed Dome Outdoor Diameter of Dome: 3.8" Preset speed: 300 Deg/Sec Preset point: 128 points. Tours: 6 programmable(Dwell time/Speed/Preset point). Vanda proof: IP66	$272	$269
outdoor IP66	TO-7309UE	Color 1/3" SONY Effio-E (NR, PM, MD), 700TV L Low Illumination, ATR,OSD (673+4127)	Vandal proof Mini PT Speed Dome camera Pan range: 0°~360° Continue (Not 355°) Tilt range: 0°~90° Flip Pan Speed: Max 50°/sec Preset: 16 Weatherproof Outdoor IP66 RS485, Pelco D/P supported Lens: 4-9mm Manual Zoom Lens 5-15 Lens Optional Size: Ø121x177mm; Weight: 2.8Kg Add 4$ for Two brackets included (for Ceiling & Side mount)	$96	$95
	TO-7309YN	Color 1/3" SONY, 600TVL Low Illumination, DWDR,OSD (639+Next2040)		$94	$93
	TO-7309QS	Color 1/3" SONY, 420TVL, Low Illumination		$78	$77
outdoor IP66	TO-7310SM10	SAMSUNG SDM-100 X10, 1/4", ICR, 10X(f=3.8~38mm), Color 500TVL, Black 570TVL	Vandal proof Mini PTZ Speed Dome camera Pan range: 0°~360° Continue (Not 355°) Tilt range: 0°~90° Flip Pan Speed: Max 50°/sec Preset: 16 Weatherproof Outdoor IP66 RS485, Pelco D/P supported 10X optical zoom lens(f=3.8~38mm) Size: Ø138x212mm Weight: 2.8Kg Add 4$ for Two brackets (for Ceiling & Side mount)	$212	$210
	TO-7310CN10	10X, 1/4" Super HAD Sony Color CCD, 10X(f=3.8~38mm), Color 480TVL		$120	$119
4 Inch Mini High Speed Dome Camera					
	TO-74QS01	**4'', Indoor, medium speed dome with OSD** IR distance up to 50 meters DC 12V power supply,ceiling mount 420TVL,F1.2/4/6/8mm fixed lens		$111	$110
	TO-74EN02	4'', Indoor, medium speed dome with OSD IR distance up to 50 meters DC 12V power supply,ceiling mount 520TVL, F1.2/2/4/6/8mm fixed lens		$123	$122
	TO-74UE03	4'', Indoor, medium speed dome with OSD,IR distance up to 50 meters DC 12V power supply,ceiling mount, 650TVL, F1.2/2/4/6/8mm fixed lens		$133	$132
	TO-745CN10	4'', Indoor, medium speed dome with OSD, IR distance up to 50 meters, DC 12V power supply, ceiling mount, 480TVL 10*zoom day/night		$155	$154
	TO-745CN10Y	4'', Indoor, medium speed dome with OSD, IR distance up to 50 meters, DC 12V power supply, ceiling mount, 600TVL, 10*zoom day/night		$172	$170
	TO-745SM12	4'', Indoor, medium speed dome with OSD IR distance up to 50 meters, DC 12V power supply, ceiling mount, Samsung SCM2121 560TVL 12*zoom day/night		$249	$246
NEW	TO-7410CN10	1/4" CCD, 10X optical zoom, 480TVL, IR Sensor, transfer color to B/W at night, 0.05Lux low illumination, digital auto focus, 3.8~38mm, AGC, auto white balance	Day & night function, OSD English menu. High performance step motor, accuracy: 0.05°; 256 presets, accuracy: ±0.05°;Pan range 360°,Tilt range 180°(auto flip). Pan Speed: 360° continuous rotation; Multi-scans: lines scanning,patterns,tours,360°intermittent, autos; RS485, Pelco D/P protocol optional. Customized protocol available. Support soft address, available to set the dome address by remote access; Proportional pan/tilt speed, auto flip; MH30A-1 for suspended installation, other types could install: ceiling/wall mount, indoor/outdoor for option. Support Pelco D/P.	$147	$146
	TO-7410SM10	SAMSUNG 10X SDM-100, 1/4", ICR, 10X (f=3.8~38mm), Color 500TVL, Black 570TVL.		$233	$231
6 Inch Medium Speed Dome Camera (TO-760X series)					
NEW NEW Design Outdoor IP66	TO-7606CN26	1/4" Super HAD CCD Camera: AT2748, 26X, D/N(IR-CUT) 0.02Lux 540TVL	Medum Speed Dome Out Door HOT Diameter of Dome: 6" Preset speed: 120 Deg/Sec Preset point: 64 points. Tours: 6 programmable(Dw time/Speed/Preset point).	$265	$262
	TO-7606SM23	1/4" Interline Transfer CCD Samsung SCM-2231, 23X, D/N 0.2Lux./color, 0.02Lux./D&N. 550TVL		$338	$334
	TO-7606SM27	1/4" Super HAD CCD Samsung SCM-2271, 27X, D/N Lens: 3.5-94.5mm 0.02Lux./D&N. 550TVL		$350	$346

6 Inch High Speed Dome With OSD

outdoor IP66	TO-7601CN30	1/4" Sony CCD, 520TVL, 30X optical zoom, 0.01Lux low illumination, AGC, White balance, BLC, transfer color to B/W at night.	English intelligent OSD Menu; RTC special for user to call any function; 360°endless rotation, 180°tilt rotation, auto flip; Pan/tilt speed: 0.08°~300°/sec 220 presets, accuracy: ±0.1°, 4 tours, 4 patterns, 8 zones, 8 privacy masks; Set running time and call any function like preset, tour, pattern or line scan; Built-in lightening and surge protection; Software update interface; Display the temperature inside dome and environment; Indicate the direction and display on the screen; Menu password protection; Built in multi-protocol for match different devices, baud rate: 2400, 4800, 9600, 19200bps; Built in alarm: 7 inputs/2 outputs; Work temperature: -35°C~+50°C	$176	$174
	TO-7605S37	SONY FCB-CX1020EP 36X Optical Zoom module low lux Color to black IR-cut,37X Optical Zoom 10X digital Zoom, Color 550TVL, B/W 660TVL	Address 0~255 Pan range 360°Continue Tilt range 0°~90°Flip Manual speed Pan 0.1~300°/Sec Manual speed Tilt 0.1~120°/Sec Preset speed 360°/Sec, Preset accuracy ±0.10° Operation menu Multi-Language (English Chinese German , French, Russian, Italian, Spanish.) User admin: Master/Operator password setup Date/Time setup and display Power ON/OFF and Mode setup 8 inputs, normality setup, Notice Label display, Trigger or recall function,Prior,Operation time setup Label display,Operation time setup etc. Temperature alarm, Notice Label display and temperature display Pan and Tilt position display. privacy zones (Masking) PTZ Tours (Pattern) 3 Programable (Pan/Tilt/Zoom and each tour is 120 seconds) 6 Programable(Dwell time speed preset point and embed other vector scan or PTZ tours. Pelco_D/P , Alec Auto Scan, with Smart Programable variable speed High efficient 3-dimension scan Long-focus speed-limited Intelligent power off real time memory Home position IP66 for outdoor use Operating Temperature –30℃~60,℃ Humidity ~90% Heater in operation 6℃on 14 off	$561	$555
	TO-7605M37	Samsung SCM-2371 module,low lux Color to black IR-cut ,37X Optical Zoom 10X digital Zoom, 560TVL, B/W 680TVL		$438	$433
outdoor IP66	TO-7605SM27	1/4" Super HAD CCD Samsung SCM-2271 27X, D/N Lens: 3.5-94.5mm 0.2Lux./color, 0.02Lux./D&N. 550TVL Color 680TVL B/W		$358	$354
	TO-7610S18	1/4" Ex-view HAD CCD Samsung SCM-2271, 27X, D/N. 550 TVL/color, 680TVL/ B/W 0.01Lux.	High Speed Dome Indoor Diameter of Dome: 6" Function display: OSD. Preset speed: 300 Deg/Sec P t it128 it Preset point: 128 points. PTZ tour: 3 programmable 120Sec/tour Quick installation 24VAC 2A 60Hz/50Hz	$384	$380

6 Inch High Speed Dome With OSD & Alarm

	TO-7607M37	Samsung SCM-2371 module,low lux Color to black IR-cut ,37X Optical Zoom 10X digital Zoom, 560TVL, B/W 680TVL	Address 0~255 Pan range 360°Continue Tilt range 0°~90°Flip Manual speed Pan 0.1~300°/Sec Manual speed Tilt 0.1~120°/Sec Preset speed 400°/Sec, Preset accuracy ±0.10° Operation menu Multi-Language (English Chinese German , French, Russian, Italian, Spanish.) User admin: Master/Operator password setup Date/Time setup and display Alarm out 1 chanel Alarm in 1chanel 8 inputs, normality setup, Notice Label display, Trigger or recall function,Prior,Operation time setup Label display,Operation time setup etc. Temperature alarm, Notice Label display and temperature display Pan and Tilt position display. privacy zones (Masking) PTZ Tours (Pattern) 3 Programable (Pan/Tilt/Zoom and each tour is 120 seconds) 6 Programable(Dwell time speed preset point and embed other vector scan or PTZ tours. Pelco_D/P , Alec Auto Scan, with Smart Programable variable speed High efficient 3-dimension scan Long-focus speed-limited Intelligent power off real time memory Home position IP66 for outdoor use Operating Temperature –30℃~60,℃ Humidity ~90% Heater in operation 6℃on 14 off	$545	$539
	TO-7607SM37W	1/4" Interline Transfer CCD Samsung SCM-2271, 27X, D/N Lens: 3 84-88 0.2Lux./color, 0.02Lux./D&N. 560TVL, 680TVL B/W.		$406	$402

Auto Tracking 6" High Speed PTZ Camera

OutDoor IP66	TO-ST7606S36	Sony FCB EX1010P WDR Zoom module,low lux Color to black IR-cut 535TVL,36X Optical Zoom 12X digital Zoom	High Speed Dome Outdoor IP66 Diameter of Dome: 6" Pan range 360° Continue Tilt range: 0°~90°Flip multi-protocol Pelco_D/P, Alec Function display: OSD. Alarm: 8 inputs, 2 outputs. Preset speed: 400 Deg/Sec Preset point: 128 points. PTZ tour: 3 programmable(120 Sec/tour). Housing material: SUS-316L (Vandal proof) Multi- anguage: (English,, German,,French, Russian, Italian Spanish) Power: 24VAC 2A 60Hz/50Hz Operating Temperature –30℃~60	$704	$697
	TO-ST7606SM37	Samsung SCM-2371 module,low lux Color to black, 560TVL, 37X Optical Zoom 10X digital Zoom		$545	$539
	TO-ST7606H22	Samsung SCM-2271 module,low lux Color to black, 560TVL, 27X Optical Zoom 10X digital Zoom		$479	$474

7 Inch Variable Speed Dome Camera

OutDoor IP66	TO-7701CN30	1/4" Sony Exview HAD CCD, 30X optical zoom, 3.6~97.2mm, 520TVL, 0.1 Lux low illumination, BLC,AGC, auto white balance.	Metal frame inside. 360°continuous rotation. 8 tours, 16 presets/ group. 128 presets, support lens preset. Pan / Tilt speed: 0.5~20°/Sec changeable. Pan Range: 360°continuous; Tilt Range: 0°~90° Protocol: PELCO-D, PELCO-P auto detected. Auto Running Memory against Power Outage. Separate decoder board, strong anti-interference. Support Pelco D/P.	$145	$144
	TO-7702LG27	LG brand Zoom module Color to black,480TVL 26X optical zoom 12X digital zoom	Pan 360° continuously, tilt 90°,180° auto flip,pan speed 0-280 degree tilt speed 0-120 degree Support Display the level&vertical position and Zooming times Support alarm linkage,8 ways alarm in 2 ways alarm out 128 preset positions,4 patterns scan,each patter recording time is above 15 minutes intelligent focus,speed auto matching technology 8 areas privacy protection Built in 6000V lighting protection,Surge proof design Working temperature:-40℃-65℃ Power supply:AC24V 2A	$308	$305
	TO-7702CB27	LG brand Zoom module,Color to black 580TVL,22X Optical Zoom 12X digital Zoom		$279	$277
	TO-7702CN30	China Zoom module,420TVL,30X optical Zoom		$172	$170

LED-Array IR High/Medium Speed Dome Camera

Pic show	Model No.	Chipset	Spec	EXW SZ 1-20	EXW SZ 21-50
OutDoor IP66	TO-7703S36	Sony FCB EX1010P WDR Zoom module,low lux Color to black IR-cut 535TVL,36X Optical Zoom 12X digital Zoom	7" Double layer metal body construction Medium speed Dome waterproof IP 66 PWM function, intelligent IR illumination & power consumption is variable, dependent the zoom;IR distance 140M Horizontal Rotation Speed 1°-200°/s, Tilt Speed 100°/s Support ambient light detection, IR Illumination On 1-15 grade selectable slow speed rate 0.05°/s, accuracy 0.01°, smooth and even motion Multiple languages for OSD menu, English, Spanish, French etc Time Scheduling function , Remote Firmware upgrade via the RS485 bus Dome ID, baud rate, communication protocol can be stevia the controller Support Protocols: Pelco-D/P;Others on special request Optional IP module (built in provision), 64 bit CPU Optional, 4 Alarm inputs and 2 alarm outputs Operating Temperature Outdoor: -40°~ +60° Power AC/DC15-28V ≤3A	$659	$652
	TO-7703SM37	Samsung SCM-2371 module,low lux Color to black IR-cut 500TVL,37X Optical Zoom 10X digital Zoom		$532	$527
	TO-7703SM27	Samsung SCM-2271 Zoom module,low lux Color to black IR-cut 480TVL,27X Optical Zoom 12X digital Zoom,with WDR		$454	$450
OutDoor IP66	TO-7707S36	Sony FCB EX1010P 36*zoom day/night WDR, low lux Color to black IR-cut ,36X Optical Zoom 12X digital Zoom, 530TVL. B/W 620TVL	7" Double layer metal body construction Medium speed Dome waterproof IP 66 PWM function, intelligent IR illumination & power consumption is variable, dependent the zoom;IR distance 140M Horizontal Rotation Speed 1°-60°/s, Tilt Speed 60°/s Support ambient light detection, IR Illumination On 1-15 grade selectable slow speed rate 0.05°/s, accuracy 0.01°, smooth and even motion Multiple languages for OSD menu, English, Spanish, French etc Time Scheduling function , Remote Firmware upgrade via the RS485 bus Dome ID, baud rate, communication protocol can be stevia the controller Support Protocols: Pelco-D/P;Others on special request Optional IP module (built in provision), 64 bit CPU Optional, 4 Alarm inputs and 2 alarm outputs Operating Temperature Outdoor: -40°~ +60° Power AC/DC15-28V ≤3A	$623	$616
	TO-7707SM37W	Samsung SCM-3371 WDR module low lux Color to black IR-cut,37X Optical Zoom 12X digital Zoom, Color 560TVL. B/W 680TVL		$561	$555
	TO-7707SM37	Samsung SCM-2371 module,low lux Auto IR-cut ,37X Optical Zoom 10X digital Zoom, 560TVL. B/W 680TVL		$496	$491
	TO-7707SM27	Samsung SCM-2271module low lux , Auto IR-cut 500TVL,27X Optical Zoom 10X digital Zoom,Color 560TVL. B/W 680TVL		$418	$414
NEW OutDoor IP66	TO-7801SM37	Samsung SCM-2371 module,low lux Auto IR-cut ,37X Optical Zoom 10X digital Zoom, 560TVL,B/W 680TVL 60°/sec	NEW Infrared light variable by Zoom lens 120 meters IR view distance 8 cruising track, each track has 16 preset positions. Independent preset Parameter setup Auto flip, Power-up action. Shift rate: multilevel shift. Accurate stepping motor, high sensitivity and stable rotation. Support alarm linkage English OSD Function. RS-485 data communication. IP66 Weather-proof housing and built-in constant temperature device Lightning protection proof rate: 3 grade, and Surge protection Working temperature: -40℃-+60℃. Humidity<90%RH Materials: High Die-cast aluminum alloy construction.	$410	$406
	TO-7801SM27	Samsung SCM-2271module low lux , Auto IR-cut 500TVL,27X Optical Zoom 10X digital ,Color 560TVL,B/W 680TV 60°/sec		$341	$338
	TO-7801YE30	SONY Effio Modul X30 Zoom 600TVL 60°/sec		$260	$257
	TO-7801EE30	SONY Effio Modul X30 Zoom 480TVL 60°/sec		$195	$193
	TO-7802YE30	SONY Effio Modul X30 Zoom 600TVL 260°/sec		$297	$294
	TO-7802EE30	SONY Effio Modul X30 Zoom 480TVL 260°/sec		$232	$230

Toptico Hidden&Mini camera

Pic show	Model No.	Chipset	Spec	EXW SZ 1-50	EXW SZ 51-100
	TO-8017QS	1/3" Sony CCD&DSP 420TVL (633+3142)	Socket Camera 3.7mm Taper pinhole lens Weight: 0.2KG	$31.1	$30.8
	TO-8018UE	1/3" Sony CCD&DSP 650TVL (811+4140)	Elevator camera With standard fixed 2.5MM wide angle lens Dimension: 80(L)*80(W)*95(H) Color: Silver /White Weight:0.63kg DC12V(+/-10%) Metal case	$46.1	$45.6
	TO-8018QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$36.1	$35.7
	TO-8001QS	1/3" Sony CCD&DSP 420TVL (633+3142)	Mirror camera Lens: board lens 3.6mm suitable to hidden installation Dimension :48 x 48(H) mm Weight:0.9kg color: black reflector design, with bracket	$27.2	$26.9
	TO-8002IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	3.7 mm pinhole lens Color:Milk White DC12V(+/-10%) Plastic case Size:64*48*110mm Weight:0.2kg	$38.9	$38.5
	TO-8002QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$21.0	$20.8
	TO-8002TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$16.1	$15.9
	TO-8023IE	1/3"Sony CCD&Effio DSP 650TVL (700+4140)	PIR (Passive Infrared Sensor) Sensor 1CH audio, 1CH alarm output 3.7 mm pinhole lens Size:64*48*110mm Color:Milk White Weight:0.35kg DC12V(+/-10%) Plastic case	$43.8	$43.4
	TO-8023UE	1/3" Sony CCD&DSP 650TVL (811+4140)		$40.0	$39.6
	TO-8023QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$27.1	$26.8
	TO-8004IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	3.7 mm pinhole lens Color:Milk White DC12V(+/-10%) Plastic case With 15PCS IR led 10M Size:64*48*110mm Weight:0.3kg	$41.6	$41.2
	TO-8004QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$23.4	$23.2
	TO-8004TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$18.1	$17.9
	TO-8005IE	1/3 Sony CCD HAD II 700TVL CCD (673+4140)	Mini camera 3.6/6mm lens Color: Black Weight:0.45kg DC12V(+/-10%) Metal case	$33.9	$33.5
	TO-8005UE	1/3" Sony CCD&DSP 650TVL (811+4140)		$30.5	$30.2
	TO-8005QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$18.0	$17.8
	TO-8023YN	1/3" Sony CCD&DSP 600TVL (639+2040) OSD	Lens: board lens 3.7mm suitable to hidden installation Dimension : 24x24(H) mm AGC/BLC/AWB 0.1Lux Weight:0.3kg color: black reflector design with bracket DC: 9V-18V	$35.0	$34.6
	TO-8006IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	3.7mm pinhole lens Color:Black +2.5 $/pcs with audio SIZE: 32mm x 32mm Weight:0.45kg DC12V(+/-10%) Metal case	$37.2	$36.8
	TO-8006QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$20.9	$20.7
	TO-8006TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$15.7	$15.5
	TO-8007YN	1/3" Sony CCD&Next DSP 600TVL(639+2040)	3.6mm pinhole lens, without bracket , DC12V; IP-55 Weather-proof	$42.2	$41.8
	TO-8007RN	1/3" Sony CCD&DSP 540TVL (639+2010)		$30.7	$30.4
	TO-8007TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$17.8	$17.6
	TO-8012EN	1/3" Sony520TVLCCD (639+NEXT2010) 0.01Lux	Outdoor bullet camera waterproof IP65, **lens: Korean 4-9mm manual VF** DC12V, ф26 x 105(L)mm	$69.9	$69.2
	TO-8012QN	1/3"Sony 420TVL CCD (632+NEXT2010), 0.05lux		$55.5	$54.9
	TO-8014QS	1/3 SONY SUPER HAD CCD 420TVL (3142+633)	3.7mm pinhole lens, Mini camera Color:Blaack Weight:0.15kg DC12V(+/-10%) Metal case	$28.9	$28.6
	TO-8014TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$18.8	$18.6

Pic show	Model No.	Chipset	Spec	EXW SZ 10-50	EXW SZ 51-100
	TO-8008IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	UFO camera 3.7mm pinhole lens Color: Silver	$43.8	$43.4
	TO-8008EN	1/3" Sony CCD& Nextchip DSP 520TVL(639+2010)		$27.2	$26.9
	TO-8008QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$19.8	$19.6
	TO-8009IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	UFO camera Indoor Dome camera suitable to Elevator, standard lens: 3.6mm (+3.2$ to get 2.8mm) Size:ф99 x 60(H)mm Color: Silver DC12V	$43.3	$42.9
	TO-8009YN	1/3'' Sony CCD&NEXT DSP 600TVL 639BK+NEXT2040)		$37.0	$36.6
	TO-8009QS	1/3" Sony CCD&DSP 420TVL (633+3142)		$25.2	$24.9
	TO-8009TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$20.1	$19.9
	TO-8010IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Smoke Detector Camera ens:3.6mm Board Lens Color: White DC12V Dimension : ¢119 x 56(H) mm Weight:250g	$37.7	$37.4
	TO-8010YN	1/3" Sony CCD& Next DSP 600TVL(639+2040)		$31.3	$31.0
	TO-8010QS	1/3 SONY SUPER HAD CCD 420TVL (3142+633)		$19.9	$19.7
	TO-8010TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$14.9	$14.7
	TO-8011IE	1/3" Sony CCD& Effio DSP 700TVL (673+Effio)	Smoke Detector Camera ens:3.6mm Board Lens Dimension:¢119 x 56(H) mm Weight:250g	$37.7	$37.4
	TO-8011QS	1/3 SONY SUPER HAD CCD 420TVL (3142+633)		$19.9	$19.7
	TO-8015QS	1/3" Sony CCD&DSP 420TVL (633+3142)	Fire Detector Camera Lens:3.7mm Board Lens Color: Silver DC12V Dimension : ¢100 x 60(H) mm Weight:250g	$37.9	$37.5
	TO-8015TQR	1/4" Sharp CCD&DSP 420TVL(2421+38627)		$30.9	$30.5
	TO-8016QS	1/3" Sony CCD&DSP 420TVL (633+3142)	Rear view Car camera 3.6mm 18LED Color:Black DC12V	$31.6	$31.3
	TO-8016TQS	1/4" Sony CCD&DSP 420TVL(405+3142)		$28.3	$28.0
	TO-8021QS	1/3" Sony 420TVL CCD (15X15)	Mini 12X12 Size Snake Camera With Audio Capture Feature Pinhole 3.7mm lens, 0.5Lux Indoor Only Power : 12VDC 128mA length of the camera head to the main body is 66cm Output : 68cm cable with BNC connector Material: Aluminum	$36.8	$36.4
	TO-8021TQR	1/4" Sony 420TVL CCD (12X12)		$27.6	$27.3
	TO-8022TQS	1/4" Sony 420TVL CCD, 420TV (¢16)	Mini Size Snake Camera With Audio Capture Feature Pinhole 3.7mm lens, 0.5Lux Indoor Only Power : 12VDC 128mA length of the camera head to the main body is 66cm Output : 68cm cable with BNC connector Material: Aluminum	$40.3	$39.8

Toptico Economic IP camera

Pic show	Model No.	Spec	EXW SZ 10-50	EXW SZ 51-100
	TO-IP012	Motion JPEG video compression, high quality image 1/4" CMOS image sensor 300k pixels high quality image Water-proof metal structure ,best for outdoor installation Night vision range 35 meters with 24 IR-LEDs Support Wi-Fi 802.11b/g,secured wireless connection Wireless encryption support both WEP&WPA, WPA2 Motion detection alert via e-mail notification, FTP upload	$57	$56
	TO-IP25	Motion JPEG video compression, high quality image 1/4" CMOS image sensor 300k pixels high quality image Water-proof metal structure Support Wi-Fi 802.11b/g,secured wireless connection Wireless encryption support both WEP&WPA, WPA2 Motion detection alert via e-mail notification, FTP upload	$46	$45
	TO-IP014	MJPEG video compression, two-way audio monitoing with audio input and output 1/4" CMOS image sensor 300k pixels high quality image Remote Pan/Tilt (H:300°& V:120°) Night vision range 10 meters with 9 IR-LEDs Support Wi-Fi 802.11b/g,secured wireless connection Wireless encryption support both WEP&WPA&WPA2 Motion detection alert via e-mail notification, FTP upload	$47	$46
	TO-IP015	**H.264** video compression, with audio monitoring 1/3" Sony CCD image sensor ,D1 resolution 24pcs,r LED lights, Night vision range 20 meters Support Wi-Fi 802.11b/g,secured wireless connection Wireless encryption support both WEP&WPA&WPA2 Motion detection alert via e-mail notification, FTP upload	$113	$112
	TO-IP26	H.264 video compression, with audio monitoring 1/3" CMOS 1.0 mega pixel Support up to 32G alarm trigger local memory Night vision range 20 meters Built-in IR cut, no color cast	$131	$130
	TO-IP017	H.264 video compression, with audio monitoring 1/4" CCD image sensor ,480TVL,D1 resolution Pan:360 degree, Tilt:90 degree,Zoom: 10x optical Support Wi-Fi 802.11b/g,secured wireless connection Wireless encryption support both WEP&WPA&WPA3 Motion detection alert via email notification,FTP upload	$336	$333
	TO-IP018	1/4" CMOS,IR-Cut sensor 300K pixels,Pan/Tilt, Lens 4mm TCP/IP,UDP/IP,HTTP,SMTP,FTP,DHCP,DDNS,UPNP,NTPWIFI Daul audio,daul streaming support SD card max 32G Email/FTP/SD memory/external alarm/send message to alarm 660g, 200x150x120 DC 5V 1.5A Support 2000/XP/Vista/Windows 7/Mac OSX Mobile view	$57	$56
	TO-IP027	H.264,1/3" CMOS 1.0 mega pixel Pan/Tilt, 6mm lens 11pcs x φ5 LED,0 LUX support two way audio Support up to 32G alarm trigger local memoryTCP/IP,UDP/IP,HTTP,SMTP,FTP,DHCP,DDNS,UPNP,NTP,WIFI Pan/tilt: P=270°T=90° Email/FTP/SD memery/external alarm/send message to alarm 66 0g, 170x170x170 DC 5V 1.5A Support 2000/XP/Vista/Windows 7/Mac OSX Mobile view	$97	$96
	TO-IP020	M-JPEG,1/4" CMOS sensor,300K pixels,4.5mm lens, 11pcs x φ5 LED,0 LUX TCP/IP,UDP/IP,HTTP,DHCP,DDNS,WIFI Email/FTP/external alarm/send message to alarm server 108mm(L)*109mm(W)*131mm(H) DC 5V 1.5A Support 2000/XP/Vista/Windows 7/Mac OSX Mobile view	$43	$43
	TO-IP021	TCP/IP,UDP/IP,HTTP,DHCP 8Φ5 LED lights, IR distance: 10m 4mm Fix lens 900g,95mm(L)*51mm(W)*57mm(H) DC 5V 1.5A Support Microsoft Windows 98/2000/XP/Vista/Windows 7/Mac OSX Mobile view	$34	$34
	TO-IP022	H.264,1/3" CMOS HD Sensor,Mega pixels,CS lens TCP/IP,UDP/IP,HTTP,SMTP,FTP,DHCP,DDNS,UPNP,NTP,WIFI Daul audio,daul streaming,support SD card max 32G Email/FTP/SD memery/external alarm/send message to alarm server 410g,102mm(L)*68mm(W)*61mm(H) DC 12V 2A Support 2000/XP/Vista/Windows 7/Mac OSX Mobile view	$106	$105

Toptico MegaPixel IP camera

Pic show	Model No.	Spec	EXW SZ 10-50	EXW SZ 51-100
	IP4010M5	1/2.5" 5.0 Megapixel Aptina CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 8fps @5M(2560×1920), 20fps @3M(2048×1536) and 25/30fps @1080P resolution Dual encoding streams supported Support ICR true Day/Night Support C/CS Auto Iris lens Support Alarm I/O, RS485 and RS232 interface Max 32GB Hot-swappable SD card for local storage Wi-Fi (802.11b/802.11g) (Model -W only) Support DC12V/AC24V dual power supply, PoE Built-in Web server, NVR, CMS(PSS/DSS) & DMSS POE;WIFI optional+15$	$215	$212
	IP4010M3	1/2.8" 3.0 megapixel SONY progressive scan Exmor CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 15fps at 3.0M(2048×1536) and 25/30fps at 1080P resolution Dual encoding streams supported Support ICR true Day/Night Support C/CS Auto Iris lens Support Alarm I/O, RS485 and RS232 interface Max 32GB Hot-swappable SD card for local storage Wi-Fi(802.11b/802.11g) Support DC12V/AC24V dual power supply Built-in Web server, NVR, CMS(PSS/DSS) & DMS POE; WIFI optional+15$	$198	$196
	IP3310M3	1/2.8" 3.0 Megapixel SONY progressive scan Exmor CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 15fps at 3.0M(2048×1536) and 25/30fps at 1080P resolution Dual encoding streams supported Support ICR true Day/Night Built-in 4.5~10mm/F1.6 CS Auto Iris lens Support Alarm I/O, RS485 interface Support up to 32GB Micro SD card for local storage Support DC12V/AC24V dual power supply, POE IK10-rated Vandal-proof & IP66 Water-proof Built-in Web server, NVR, CMS(PSS/DSS) & DMSS	$209	$207
	IP3311M3	1/2.8" 3.0 Megapixel SONY progressive scan Exmor CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 15fps at 3.0M(2048×1536) and 25/30fps at 1080P resolution Dual encoding streams supported high-performance IR LEDs(10~20mSupport ICR true Day/Night Built-in 4.5~10mm/F1.6 CS Auto Iris lens Support Alarm I/O, RS485 interface Support up to 32GB Micro SD card for local storage Support DC12V/AC24V dual power supply, POE IK10-rated Vandal-proof & IP66 Water-proof Built-in Web server, NVR, CMS(PSS/DSS) & DMSS	$231	$229
	IP1110M3	1/2.8" 3.0 megapixel SONY progressive scan Exmor CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 15fps at 3.0M(2048×1536) and 25/30fps at 1080P resolution Dual encoding streams supported Support ICR true Day/Night Built-in 8~16mm/F1.6 CS Auto Iris lens Built-in high-performance IR LEDs(20~30 meters) Support Alarm I/O, RS485 interface Support max 32GB Mircro SD card for local storage Support DC12V/AC24V dual power supply, POE IP66 Water-proof protection Built-in Web server, NVR, CMS(PSS/DSS) & DMSS	$286	$283
	IP1111M3	1/2.8" 3.0 megapixel SONY progressive scan Exmor CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture Max 20fps@3M, 25/30fps@1080P resolution Dual encoding streams supported Support ICR true Day/Night Built-in 3.3~12mm/F1.4 CS Auto Iris lens Max. IR distance: 20m Support Alarm I/O Support max 32GB Mircro SD card for local storage IP66 Water-proof protection Built-in Web server, NVR, CMS(PSS/DSS) & DMSS DC12V(AC24V optional), PoE	$264	$261

	IP3010M2	1/3" 2.0 Megapixel SONY progressive scan Exmor CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture Max 25/30fps@1080P resolution Dual encoding streams supported Lens: 3.6mm(2.8mm/6mm/8mm optional) Max 32GB Micro SD card for local storage Support DC12V power supply, PoE IK10-rated Vandal-proof & IP66 Water-proof Built-in Web server, NVR, CMS(PSS/DSS) & DMS	$105	$103
 	IP1112M2	1/3" 2.0 Megapixel SONY progressive scan Exmor CMOS;25/30fps@1080P resolution; Dual encoding streams supported;Support ICR true Day/Night; Built-in 3.3~12mm/F1.4 CS Auto Irislens; Max. IR distance: 20m; Support Alarm I/O; Support max32GB Mircro SD card for local storage; IP66 Water-proofprotection; DC12V(AC24V optional), PoE	$253	$250
 	IP4012M2	1/3" 2.0 Megapixel SONY progressive scan Exmor CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture Max 25/30fps @1080P resolution Dual encoding streams supported Support ICR true Day/Night Support C/CS Auto Iris lens Support Alarm I/O, RS485 and RS232 interface Max 32GB Hot-swappable SD card for local storage Support DC12V/AC24V dual power supply, POE Built-in Web server, NVR, CMS(PSS/DSS) & DMSS, WIFI optional+add15$	$160	$158
	IP4013M13	1/3" 1.3 Megapixel Aptina CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 25/30fps @1.3M(1280×960)/720P resolution Dual encoding streams supported Support ICR true Day/Night Support C/CS Auto Iris lens Support Alarm I/O, RS485 and RS232 interface Max 32GB Hot-swappable SD card for local storage Support DC12V/AC24V dual power supply, POE Built-in Web server, NVR, CMS(PSS/DSS) & DMSS WIFIoptional+15$	$154	$152
	IP3011M13	1/3" 1.3 Megapixel Aptina CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture Max 25/30fps @720P(1280×720), 15fps @1.3M(1280×960)resolution Dual encoding streams supported Built-in 2.8mm/3.6mm/6mm/8mm lens Support DC12V power supply, POE Built-in Web server, NVR, CMS(PSS/DSS) & DMSS	$94	$93
	IP1010M13	1/3" 1.3 Megapixel Aptina CMOS image sensor High-performance TI DaVinci series DSP H.264&MJPEG video compression and JPEG image capture Max 25/30fps @720P(1280×720) , 15fps @1.3M(1280×960) resolution Dual encoding streams supported Lens: 6mm (3.6mm/8mm optional) Max. IR Distance: 20m True Day/Night ICR IP66 all-environments protection, 4000V thunder-proof, constant temperature automatic control & anti-fog Support DC12V power supply, PoE Built-in Web server, NVR, CMS(PSS/DSS) & DMSS	$99	$98
	IP4014M13	1/3" 1.3 Megapixel SONY progressive scan CCD image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 12/15fps @1.3M(1280×960), 25/30fps @720P resolution Dual encoding streams supported Support ICR true Day/Night Support C/CS Auto Iris lens Support Alarm I/O, RS485 and RS232 interface Max 32GB Hot-swappable SD card for local storage Support DC12V/AC24V dual power supply, POE Built-in Web server, NVR, CMS(PSS/DSS) & DMSS Wifi is optional +add15$	$198	$196
	IP1113M13	1/3" 1.3 Megapixel SONY progressive scan CCD image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 15fps@1.3M(1280x960) and 25/30fps@720P resolution Dual encoding streams supported Support ICR true Day/Night Built-in 8~20mm/F1.6 CS Auto Iris lens Built-in high-performance IR LEDs 50 metes Support Alarm I/O Support max 32GB Mircro SD card for local storage Support DC12V(AC24V optional), PoE IP66 Water-proof protection Built-in web server, NVR, MSS & CMS	$275	$272

	IP3312M13	1/3" 1.3 Megapixel SONY progressive scan CCD image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 12/15fps @1.3M(1280×960) and 25/30fps@720p resolution Dual encoding streams supported Support ICR true Day/Night Support C/CS Auto Iris lens 2.8~12mm/F1.6 Support Alarm I/O, Max 32GB Hot-swappable Mirco SD card for local storage Support DC12V/AC24V dual power supply, PoE Built-in web server, NVR, MSS & CMS	$264	$261
	IP3313M13	1/3" 1.3 Megapixel SONY progressive scan CCD image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 12/15fps@1.3M(1280×960) and 25/30fps@720p resolution Dual encoding streams supported Support ICR true Day/Night Support C/CS Auto Iris lens 2.8~12mm/F1.6 Max. IR distance: 20m Support Alarm I/O Max 32GB Hot-swappable SD card for local storage Support DC12V/AC24V dual power supply, PoE Built-in web server, NVR, MSS & CMS	$281	$278
	IP4014M2	2/3" 2.0 Megapixel KODAK progressive scan CCD image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 25/30fps at 1080P resolution Dual encoding streams supported Support ICR true Day/Night Support CS Auto Iris lens Support Alarm I/O, RS485 and RS232 interface Max 32GB Hot-swappable SD card for local storage Support DC12V/AC24V dual power supply, PoE Built-in Web server, NVR, CMS(PSS/DSS) & DMSS	$612	$605
	IP4015D1	3" SONY CCD; TI DSP; 25/30fps at D1/HD1/CIF/VGA; Dualstreams; Multi-zone video detection and privacy masking; 1channel analogue video BNC output; Alarm I/O, RS485 and RS232interface; Max 32GB SD card;DC12V	$165	$163
	IP4016D1	3" SONY CCD; TI DSP; 25/30fps at D1/HD1/CIF/VGA; Dualstreams; Multi-zone video detection and privacy masking; 1channel analogue video BNC output; Alarm I/O, RS485 and RS232interface; Max 32GB SD card;DC12V; PoE;Wi-Fi	$182	$180
	IP1010M13	1/3" SONY Super HAD CCD; TI DSP; 25/30fps atD1/HD1/CIF/VGA resolution; Dual streams; Multi-zone videodetection and privacy masking; 1 channel analogue video BNCoutput; Support Alarm I/O, RS485 interface; SD card; Different lensand IR LEDs for choice; IP 65 protection level; DC12V;	$149	$147
	IP2012D1	1/3" SONY CCD; TI DSP; 25/30fps at D1/HD1/CIF/VGA; Dualstreams; Multi-zone video detection and privacy masking; 1channel analogue video BNC output; Support Alarm I/O, RS485interface; MicroSD card; Different lens for choice DC12V	$143	$142
	IP3014D1	1/3" SONY CCD; TI DSP; 25/30fps at D1/HD1/CIF/VGA; Dualstreams; Multi-zone video detection and privacy masking; 1channel analogue video BNC output; Support Alarm I/O, RS485interface; MicroSD card; Different lens for choice DC12V;PoE	$154	$152
	IP3012D1	1/3" SONY CCD;TI DSP; 25/30fps at D1/HD1/CIF/VGA resolution;Dual streams; Multi-zone video detection and privacy masking; 1channel analogue video BNC output; Support Alarm I/O, RS485interface; SD card ; Different lens and IR LEDs for choice;DC12V	$154	$152
	IP3013D1	1/3" SONY CCD;TI DSP; 25/30fps at D1/HD1/CIF/VGA resolution;Dual streams; Multi-zone video detection and privacy masking; 1channel analogue video BNC output; Support Alarm I/O, RS485interface; SD card ; Different lens and IR LEDs for choice;DC12V;PoE	$161	$159
	IP3015D1	1/4" CMOS image sensor High-performance TI DaVinci series DSP H.264 video compression and JPEG image capture 25/30fps at VGA/CIF/QVGA/QCIF/QQVGA resolution Dual encoding streams supported Support ICR true Day/Night 2 /1channel alarm IN/OUT(I/O Port cable Extension) Built-in high performance IR LEDs(7~10 meters) Built-in 1 channel PIR sensor Max 32GB Hot-swappable SD card for local storage Built-in Web server, NVR, CMS(PSS/DSS) & DMSS; WIFI optional+17$	$72	$71

Toptico HD-SDI camera

Pic show	Model No.	Spec	EXW SZ 10-50	EXW SZ 51-100
	HD4001	2/3" 2.0 Megapixel KODAK progressive scan CCD image sensor; High color reproduction and high sensitivity; Standard HD-SDI high-definition digital interface (conforms to SMPTE 292M standard); Full-HD 1080P(1920×1080) HD-SDI video out with 25fps; Support ICR true Day/Night; Support network System parameters configuration; Support Dual Power AC24V/DC12V	$606	$600
	HD4002	1/2.8" 3.0 Megapixel SONY progressive scan Exmor CMOS image sensor; High color reproduction and high sensitivity; Standard HD-SDI high definition digital interface(SMPT274/292); Full HD 1080P(1920×1080) HD-SDI video out with 25/30fps; Support ICR true Day/Night; Support RS485 System parameters configuration; Support Dual Power AC24V/DC12V; Support OSD menu	$191	$189
	HD3301	1/2.8" 3.0 Megapixel SONY progressive scan Exmor CMOS image sensor; High color reproduction and high sensitivity; Standard HD-SDI high definition digital interface(SMPT274/292); Full HD 1080P(1920×1080) HD-SDI video out with 25/30fps; Built-in 3.3~12mm/F1.4 CS Auto Iris lens; Support ICR true Day/Night; Support RS485 System parameters configuration; Support Dual Power AC24V/DC12V; IK10-rated Vandal-proof & IP66 Water-proof	$245	$243
	HD3302	1/2.8" 3.0 Megapixel SONY progressive scan Exmor CMOS image sensor; High color reproduction and high sensitivity; Standard HD-SDI high definition digital interface(SMPT274/292); Full HD 1080P(1920×1080) HD-SDI video out with 25/30fps; Built-in 3.3~12mm/F1.4 CS Auto Iris lens; Built-in high-performance IR LEDs(10~20m); Support ICR true Day/Night; Support RS485 System parameters configuration; Support Dual Power AC24V/DC12V; IK10-rated Vandal-proof & IP66 Water-proof	$273	$270
	HD7601	Max 400 °/s pan speed, 360° continuous pan rotation & auto flip with no blind spot monitor Up to 255 preset, 5 auto scan, 8 tour, 5 pattern Auto recognition of general protocols such as DH-SD, Pelco-P/D, and etc Speed setup according to the focal distance, auto rotation speed adjust in accordance with the lens zoom rate Auto restore to previous PTZ and lens status after power failure Time Task: Auto activation of Preset/Scan/Tour/ Pattern by preset-time Idle task function supported: Call preset/tour and etc operations after idle for the specified time (including the idle status after the system boots up) OSD and operation prompts of various languages Build-in 7/2 channel alarm input/output Unique 3D positioning function IP67 all-environments protection, 4000V thunder-proof, auto constant temperature & anti-fog Easy installation with user-friendly design	$1,254	$1,241
	HD7602		$654	$647

Toptico Stand Alone DVR

Pic show	Model No.	Spec	EXW SZ 50-100	EXW SZ
NEW	DVR1600	• 4/8/16 channels CIF standalone DVR • 1 channel audio inputs • H.264 video compression algorithm ideal • Dual encoding streams supported • TV(BNC)/VGA video output • Chrome,Safari,Firefox.IE 6789.ect • Smart video detection: MD, camera blank, video loss • Android,Blackberry,Mobile system,Symbian, Iphone Suport • Easy backup: USB devices & network download • Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload • Up to 1 SATA HD, 2 USB2 • Remote conrol Add 4USD	66	65
	DVR800		47	46
	DVR400		40	39
	DR410AL	• 4 channels entry level simple 1U standalone DVR • Up to 4 cameras with SXGA(1280×1024) display • H.264 video compression algorithm ideal • Each channel at CIF or 6/7fps at D1 recording • Dual encoding streams supported • TV(BNC)/VGA synchronous video output • live, recording, playback, backup & remote access	72	70
	DR410	• 4 channel simultaneous playback • Smart video detection: MD, camera blank, video loss • 3D intelligent positioning with DAHUA PTZ dome • Easy backup: USB devices, network download • Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload: HD-DVR0404LE-AS • Supports 1 SATA HDD, 2 USB2.0 • Built-in web server, multi-DVR client, MSS & CMS	68	67
	DR1640	• 8/16 channel entry level 1U standalone DVR • Up to 8/16 cameras with SXGA(1280×1024) display • 4 channel audio inputs • H.264 video compression algorithm ideal • Each channel 25/30fps at CIF or 6/7fps at D1 recording • Dual encoding streams supported • TV(BNC)/VGA/Spot synchronous video output(Spot output only for DVR1604LE-AS)	127	124
	DR820	• live, recording, playback, backup & remote access • 16 channel simultaneous playback • Smart video detection: MD, camera blank, video loss • 3D intelligent positioning with DAHUA PTZ dome • Easy backup: USB devices, network download • Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload • Supports 1 SATA HDD, 2 USB2.0 • Built-in web server, multi-DVR client, MSS & CMS	86	84
	DR1640D1	• 4/8/16 channels full D1 standalone DVR • 4/8/4 channel audio inputs • H.264 video compression algorithm ideal • Full channel at D1(4CIF) realtime recording • Dual encoding streams supported	330	323
	DR820D1	• TV(BNC)/VGA/HDMI synchronous video output • live, recording, playback, backup & remote access • 16 channel simultaneous playback • Smart video detection: MD, camera blank, video loss • 3D intelligent positioning with DAHUA PTZ dome	275	270
	DR410D1	• Easy backup: USB devices, CD/DVD-RW & network download • Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload • Up to 2 SATA HDDs & CD/DVD-RW, 2 USB2	198	194
NEW	DR3280SP	• 24/32 channels high performance standalone DVR • Full channel 2CIF or every 4ch: 1ch D1 & 3ch CIF realtime recording • H.264 video compression algorithm ideal • 4 channel audio inputs • Dual encoding streams supported • TV(BNC)/VGA/HDMI synchronous video output • live, recording, playback, backup & remote access	385	377
	DR2480SP	• 1/4/8/9/16/25/36 channel simultaneous playback • Smart video detection: MD, camera blank, video loss • 3D intelligent positioning with DAHUA PTZ dome • Easy backup: USB devices, CD/DVD-RW & network download • Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload • Up to 8 SATA HDDs & CD/DVD-RW, 1 eSATA, 2 USB2.0 • Built-in web server, multi-DVR client, MSS & CMS	330	323
	ESS4HD	• 4 HDDs eSATA Storage • 1.5U standard 19-inch rack case • eSATA port transmission speed up to 3Gbp/s • Powerful R / W performance: read >70MB/s, write >40MB/s • Max support Internal 4 SATA HDD up to 12TB • Recommended with DVR, NVR connection • AC 100~240 V, 50/60 Hz	149	146
NEW	DR1640D1PE	•Professional 4/8/16CH real time D1 recording. Premier image quality&performance. •Up to 4/8/16 Effio cameras with 1080p realtime preview •Full channel@960H(960×576/960×480) realtime recording • 4/8/4 channel audio inputs • HDMI / VGA / TV / Spot simultaneous video output •Programmable display/spot out/alarm mode	671	658
	DR820D1PE	•Advanced recording program •Privacy mask\digital zoom\snapshot •Digital watermark •Strong log function supported •Powerful remote configuration and maintenance function	462	453
	DR410D1PE	•Redundant recording •Features for large scale installations •Perfect support of IPhone, Blackberry, Google phone, Symbian and Windows mobile •External storage via E-SATA •Express backup •Professional CMS and clients software	363	356

Hybride Stand Alone DVR				
	HDR16440	• 4/8/16 channel analog and 4/8/16 channel IP inputs hybrid DVR • Up to 8/16/32 channel with 1080p realtime live view • H.264 compression and H.264/MPEG4 decoding • Analog: 4/8/16 channel@D1(4CIF) realtime recording	429	420
	HDR8240	• IP: Max 120fps@1080p, 240fps@720p, 480fps@D1 • 4/8/16 Audio Input • TV(BNC)/VGA/HDMI synchronous video output • Live, recording, playback, backup & remote access • 16 channel simultaneous playback	385	377
	HDR4140	• Smart video detection: MD, camera blank, video loss • 3D intelligent positioning with DAHUA PTZ dome • HDMI / VGA / TV / Spot simultaneous video output • Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload • Up to 8 SATA HDDs & CD/DVD-RW, 1 eSATA, 2 USB2.0	275	270
Mobile DVR				
	MDVR410S	• 4 channels mobile standalone DVR • H.264 video compression algorithm ideal • 1DIN compact size(CD machine standard size) and standard car electronic interface • easy for embedded installation • Multi-information display and recording: Car Number, Time, Channel, GPS, Speed •Station name information, support freely setting of overlay and recording • Watermark prevent video data tampering, to ensure the authenticity of the record	330	323
	MDVR410	• Support wide voltage car power supply input(8~60V •protection of overvoltage, under-voltage, short circuit and over-current • Air connector interface used, provide excellent waterproof, shockproof performance • Pluggable HDD-case used, provide powerful vibration-proof capability • USB 2.0, Ethernet port, RS232,RS485 port, VGA, Alarm in/out GPS, Wi-Fi, 3G • Built-in web server, multi-DVR client, MSS & CMS (The GPS, WiFi, 3G are optional) CDMA2000 is USD65; WCDMA is USD85 ,GPS is USD45, WIFI is USD32	275	270
Network Video Server NVR				
	NVR160	• 1U standalone Network Video Recorder • 4/8/16 ch 1080P IP input • Dual-core CPU presents powerful preview, recording, playback &network performance • Up to 4 channel 1080P cameras realtime live view	198	194
	NVR80	• H.264/MPEG-4 dual codec decoding • 16 channel@D1, 8 channel@720P, 4 channel@1080P realtime recording • All channel simultaneous realtime playback, GRID interface & smart search • Support Multi-brand network cameras such as: Dahua, Arecont Vision, AXIS, Canon, Dynacolor, Panasonic, SAMSUNG, SANYO, SONY and ONVIF • Support remote network camera encoding setting & image adjust	176	172
	NVR40	• IP Search feature to automatically discover network cameras • Support 2 SATA HDDs up to 6TB, 2 USB2.0 • Built-in web server, CMS(DSS/PSS) & DMSS	165	162
HD-SDI DVR				
	DR40SDI	• 4 channel HD-SDI 1080P standalone DVR • Dual-core CPU presents the powerful preview, recording, playback and network performance • 4 channel 1080P(25/30)/1080i(50/60)/720P(25/30,50/60) HD-SDI video inputs • H.264 dual-stream video compression • 4 channel@1080P realtime recording • HDMI / VGA / TV (BNC) synchronous video output • Up to 4 channel 1080P cameras realtime preview • 4 channel simultaneous realtime playback, GRID interface & smart search • Smart video detection: MD, camera blank, video loss • 3D intelligent positioning with Dahua PTZ dome camera • Easy backup: USB devices, CD/DVD-RW & network download • Alarm triggering screen tips, buzzer, PTZ, e-mail & FTP upload • Support 8 SATA HDDs up to 24TB, 1 eSATA up to 12TB, 3 USB2.0 • Built-in web server, CMS(DSS/PSS) & DMSS	649	636

Toptico CCTV Lens

Mega Pixel & Day Night Infrared Lens

Picture	Model No.	Focal length	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	EXW SZ: 1-100PCS	Comment
Mega Pixel & Day Night Infrared Lens												
Picture	**Model No.**	**Focal length**	**Aperture**	**Iris**	**Mount**	**Format (inch)**	**Horizontal Field of View**	**M.O.D (m)**	**Dimension (mm)**	**Weight (g)**	**EXW SZ: 1-100PCS**	**Comment**
	TV0409A.IT	4～9	1.4	DC	CS	1/3″	60°～30°	0.2	φ29*41.5*43.5	56	$11.0	1.3M Pixel
	TV0409M.IT	4-9	1.4	Manual	CS	1/3'	60°～30°	0.2	φ31*39.6	52	$7.8	
	TV0409AB.IT(M12)	4～9	1.4	DC	M12*0.5	1/3″	60°～30°	0.2	φ28*40*40	39	$9.8	
	TV0409AB.IT(φ14)	4～9	1.4	DC	φ14	1/3″	60°～30°	0.2	φ28*40*40	39	$9.8	
	TV0409FB.IT (M12)	4～9	1.4	Fixed	M12*0.5	1/3″	60°～30°	0.2	φ28*40	35	$7.5	
	TV0409FB.IT (φ14)	4～9	1.4	Fixed	φ14	1/3″	60°～30°	0.2	φ28*40	35	$7.5	
	TV0409FB.IT (pulley)	4～9	1.4	Fixed	φ14	1/3″	60°～30°	0.2	φ28x40.2x38	52	$7.8	
	TV0409AB.ICT	4～9	1.4	IR CUT	φ14	1/3″	60°～30°	0.2	φ28x40.2x40.3	39	$16.8	
	TV0515A.IT	5～15	1.4	DC	CS	1/3″	41°～19°	0.2	φ29*43*43.5	58	$12.1	1.3M Pixel
	TV0515M.IT	5～15	1.4	Manual	CS	1/3″	41°～19°	0.2	φ31x42.1	55	$9.8	
	TV0515AB.IT(M12)	5～15	1.4	DC	M12*0.5	1/3″	41°～19°	0.2	φ28*40x40	39	$10.1	
	TV0515AB.IT(φ14)	5～15	1.4	DC	φ14	1/3″	41°～19°	0.2	φ28x40.2x40	39	$10.1	
	TV0515FB.IT (M12)	5～15	1.4	Fixed	M12*0.5	1/3″	41°～19°	0.2	φ28*40.5	34	$7.8	
	TV0515FB.IT(φ14)	5～15	1.4	Fixed	φ14	1/3″	41°～19°	0.2	φ28*40.5	34	$7.8	
	TV0515FB.IT(pulley)	5～15	1.4	Fixed	φ14	1/3″	41°～19°	0.2	φ38x40.5x38	52	$8.7	
	TV0515AB.ICT	5～15	1.4	IR CUT	φ14	1/3″	41°～19°	0.2	φ28x40.5x40.3	39	$18.5	
	TV0820A.IT	8～20	1.4	DC	CS	1/3″	33°～14.5°	0.2	φ29*43*43.5	58	$13.3	1.3M Pixel
	TV0820AB.IT(M12)	8～20	1.4	DC	M12*0.5	1/3″	33°～14.5°	0.2	φ28*41.2*40	40	$11.0	
	TV0820AB.IT(φ14)	8～20	1.4	DC	φ14	1/3″	33°～14.5°	0.2	φ28*41.2*40	40	$11.0	
	TV0820FB.IT(M12)	8～20	1.4	Fixed	M12*0.5	1/3″	33°～14.5°	0.2	φ28*41.2	40	$8.7	
	TV0820FB.IT (φ14)	8～20	1.4	Fixed	φ14	1/3″	33°～14.5°	0.2	φ28*41.2	40	$8.7	
	TV0820FB.IT (pulley)	8～20	1.4	Fixed	φ14	1/3″	33°～14.5°	0.2	φ38x41.2x38	53	$9.0	
	TV0820AB.ICT	8～20	1.4	IR CUT	φ14	1/3″	33°～14.5°	0.2	φ28x41.2x40.3	40	$22.0	
	TV02812A.IT	2.8～12	1.4	DC	CS	1/3″	92°～27.2°	0.2	φ29*44*43	72	$19.0	1.6 MP
	TV02812AB.IT(φ14)	2.8～12	1.4	DC	φ14	1/3″	92°～27.2°	0.2	φ28.5*43.5*41.6	43	$14.3	
	TV02812FB.IT (φ14)	2.8～12	1.4	Fixed	φ14	1/3″	92°～27.2°	0.2	φ28.5*43.5	40	$11.0	
	TV02812AB.ICT	2.8～12	1.4	IR CUT	φ14	1/3″	92°～27.2°	0.2	φ28.5*43.5*41.6	43	$20.4	

Mega Pixel Lens

Picture	Model No.	Focal length	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	EXW SZ: 1-100PCS	Comment
	HV0612MC.HT	6～12	1.6	Manual	C	1/2″	53°～28°	0.3	φ32*44.8	72	$24.8	3MP
	HV0922FC.HT	9～22	2.0	Fixed	C	1/2″	41°～17°	0.3	φ28*40	50	$17.9	1MP
	HV0922AC.HT	9～22	2.0	DC	C	1/2″	41°～17°	0.3	φ29*40*48	72	$22.6	1MP
	HV0922AB.HT	9～22	2.0	DC	M12*0.5	1/2″	41°～17°	0.3	φ28*42*40	50	$22.6	1MP

Day Night Infrared Lens

Picture	Model No.	Focal length	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	EXW SZ: 1-100PCS	Comment
	TV0550A.IT	5～50	1.4	DC	CS	1/3″	49°～5°24'	0.5	φ37x64.4x46.5	118	$27.0	
	TV0660A.IT	6～60	1.6	DC	CS	1/3″	44°～4.58°	0.5	φ37x68.6x46.5	123	$29.7	
	TV0660M.IT	6～60	1.6	Manual	CS	1/3″	44°～4.58°	0.5	φ37x68.7x34	118	$20.9	

Day Night Infrared Lens

Picture	Model No.	Focal length	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	EXW SZ: 1-100PCS	Comment
	TV03509FB.IT (ø14)	3.5～9	1.2	Fixed	φ14	1/3″	80°～30°	0.15	φ28*37.5	19.5	$6.4	Aspherical
	TV03509FB.IT(M12*0.5)	3.5～9	1.2	Fixed	φ12*0.5	1/3″	80°～30°	0.15	φ28*37.5	19.5	$6.4	2 kinds iris head
	TV03509FB.IT (pulley)	3.5～9	1.2	Fixed	φ14	1/3″	80°～30°	0.15	φ38*37.5	49	$6.6	Aspherical
	TV0615FB.IT	6～15	1.4	Fixed	φ14	1/3″	43°～19°	0.3	φ38*40	56	$9.4	
	HS2514F.IT	25	1.4	Fixed	CS	1/2″	16°	0.5	φ33.5*25.5	46	$8.9	
	TV0308M.IT	3-8	1.0	Manual	CS	1/3"	77°15'～33°25'	0.2	φ33x47	60	$19.0	
	TV03308M.IT	3.3～8	1.4	Manual	CS	1/3″	83°～31.2°	0.2	φ37.7x50.6	110	$17.9	

Day Night Infrared Lens

Picture	Model No.	Focal length	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	EXW SZ: 1-100PCS	Comment
	TV02812A.IT-A	2.8～12	1.4	DC	CS	1/3″	92°～24°	0.2	φ32*52*46.5	86	$17.9	
	TV0308A.IT	3～8	1.0	DC	CS	1/3"	77°15'～33°25'	0.2	33x41.5x46.5	130	$19.1	
	TV03308A.IT	3.3～8	1.4	DC	CS	1/3″	83°～31.2°	0.2	φ32x49x45	120	$16.7	
	TV03509AB.IT～φ14	3.5～9	1.2	DC	φ14	1/3″	80°～30°	0.15	φ28*37.5*37	35	$10.1	
	TV03509AB.IT (pulley)	3.5～9	1.2	DC	φ14	1/3″	80°～30°	0.15	φ28*37.5	35	$10.1	

Vari~focal Manual Iris Lens

Picture	Model No.	Focal length	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	EXW SZ: 1-100PCS	Comment
	TV02812M	2.8～12	1.6	Manual	CS	1/3″	92°～24°	0.2	φ37.5*61.5	110	$13.3	
	TV03508M	3.5～8	1.4	Manual	CS	1/3″	80°～36°	0.2	φ33*45	90	$5.8	
	TV03509M	3.5～9	1.2	Manual	CS	1/3″	77°～57°	0.3	φ30*42.4	55.5	$5.8	
	TV0550M	5～50	1.6	Manual	CS	1/3″	62°24'～6°50'	0.3	φ44*75	195.5	$17.9	
	TV07575M	7.5～75	1.6	Manual	CS	1/3″	47°36'～4°32'	0.3	φ37*82	173	$29.7	
	TV05100M	5～100	1.6	Manual	CS	1/3″	54°～27°	0.3	φ42*100	220	$27.5	
	TV10200M	10～200	1.9	Manual	CS	1/3″	26°30'~1°20'	2	φ65*174	850	$235.4	

Vari~focal Auto Iris Lens

Picture	Model No.	Focal length (mm)	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	Price: 100PCS	Comment
	HV1550A	15～50	1	DC	CS	1/2″	30.6°～9.1°	1	φ72*125	810	$106.7	big aperture
	TV02812A-A	2.8～12	1.4	DC	CS	1/3″	104°～33°	0.2	φ36*70.5	92	$13.6	half-plastic
	TV03508A	3.5～8	1.4	DC	CS	1/3″	80°～36°	0.2	Φ33x47x46.5	95	$9.1	
	TV03508A-1(big-fTHH)	3.5～8	1.4	DC	CS	1/3″	81°～34.5°	0.2	φ36x66x52	95	$11.4	bigger size
	TV03508A-A	3.5～8	1.4	DC	CS	1/3″	81°～34.5°	0.2	φ32x44x43.8	63	$6.7	ecnomic size
	TV03509A	3.5～9	1.2	DC	CS	1/3″	77°～30°	0.3	φ29*43*42.9	62	$9.1	aspherical
	TV0660A	6～60	1.4	DC	CS	1/3″	44°～4.58°	0.3	φ36x68.7x46.5	115	$19.3	
	TV07575A	7.5～75	1.6	DC	CS	1/3″	47°36′～4°32′	0.3	Φ39x76.3x48	193	$33.6	
	HV1230A.IT	12～30	1.6	DC	CS	1/2″	29°～12°25'	0.3	Φ32x57.7x47.2	100	$24.9	
	TV05100A	5～100	1.6	DC	CS	1/3″	52°～2°48'	0.3	φ37x74x48	160	$27.2	

Mono Focal Fixed Iris Lens

Picture	Model No.	Focal length (mm)	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	Price: 1-100PCS	Comment
	TS02116F	2.1	1.6	Fixed	CS	1/3″	85°	0.15	φ30*28	36	$7.2	
	TS02516F	2.5	1.6	Fixed	CS	1/3″	82°	0.15	φ30*28	36	$7.7	
	TS02816F	2.8	1.6	Fixed	CS	1/3″	80°	0.15	φ30*28	36	$5.3	
	TS0416F.IT	4	1.6	Fixed	CS	1/3″	56.5°	0.2	Φ28x25	32.8	$3.0	IR
	TS0616F.IT	6	1.6	Fixed	CS	1/3″	38.5°	0.2	φ28X33	44.5	$3.0	IR
	TS0816F.IT	8	1.6	Fixed	CS	1/3″	26.7°	0.2	φ28X32	42.8	$3.0	IR
	TS1216F.IT	12	1.6	Fixed	CS	1/3″	22.4°	0.3	φ28X28.2	36.5	$3.0	IR
	TS1616F.IT	16	1.6	Fixed	CS	1/3″	14.4°	0.3	φ28X29.3	38	$3.0	IR
	HS2514F.IT	25	1.4	Fixed	CS	1/2″	16°	0.5	φ33.5*25.5	46	$9.9	IR&HR

Motorized Zoom Lens (3 Motors)

Picture	Model No.	Focal length (mm)	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	Price: 1-100PCS	Comment
	TB0636GJ	6～36	1.2	motorized	CS	1/3″	43°～7°42'	1.3	W56*H76*L84	400	$57.8	
	TB08551GJ	8.5～51	1.6	motorized	CS	1/3″	31°31′～5°36′	1	W56*H76*L82	420	$62.7	
	TB0660GJ	6～60	1.2	motorized	CS	1/3″	43°30′～4°40′	1.6	W66*H79*L82	560	$82.5	
	TB10160GJ	10～160	2.2	motorized	CS	1/3″	25°45′～1°42′	3	W66*H79*L110	550	$170.5	
	TB10200GJ	10～200	1.9	motorized	CS	1/3″	26°30′～1°20′	2	W77*H92*L171	860	$308.0	
	HB0880GJC	8～80	1.2	motorized	C	1/2″	42°36′～4°36′	2	W66*H79*L125	600	$170.5	

Motorized Zoom Lens (2 Motors)

Picture	Model No.	Focal length (mm)	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	Price: 1-100PCS	Comment
	TB0636GAJ	6～36	1.2	DC	CS	1/3″	43°～7°42'	1.3	W56*H76*L84	390	$74.8	
	TB08551GAJ	8.5～51	1.6	DC	CS	1/3″	31°30′～5°36′	1	W56*H76*L90	410	$69.3	
	TB0660GAJ	6～60	1.2	DC	CS	1/3″	43°30′～4°40′	1.6	W66*H79*L82	560	$102.3	
	TB10200GAJ	10～200	1.9	DC	CS	1/3″	26°30′～1°20′	2	W77*H92*L160	850	$343.2	
	HB10200GAJ	10～200	1.9	DC	C	1/2″	35°30′～1°46′	2	W79*H92*L171	850	$340.0	

Pinhole Lens

Picture	Model No.	Focal length (mm)	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	Price: 1-100PCS	Comment
	HB1060GCK	10～60	2.5	Fixed	C	1/2″	35°9′～6°6′	1	φ32.5*53*130	120	$275.0	Motor Zoom
	HB1060MCK	10～60	2.5	Fixed	C	1/2″	35°9′～6°6′	1	φ31*130	100	$192.5	Motor Zoom
	TS02816MK	2.8	1.6	Manual	CS	1/3″	80°	0.2	φ23*89	100	$62.7	
	TS0420MK	4	2.0	Manual	CS	1/3″	62°	0.3	φ17*75.5	65	$35.2	
	TS0620MK	6	2.0	Manual	CS	1/3″	43°	0.3	φ17*68	65	$35.2	
	TS02816AK	2.8	1.6	DC	CS	1/3″	80°	0.2	φ23*45*89	105	$69.3	
	TS0420AK	4	2.0	DC	CS	1/3″	62°	0.3	φ17*45*77	70	$40.7	
	TS0620AK	6	2.0	DC	CS	1/3″	43°	0.3	φ17*45*77	70	$40.7	

Board Lens

Picture	Model No.	Focal length (mm)	Aperture	Iris	Mount	Format (inch)	Horizontal Field of View	M.O.D (m)	Dimension (mm)	Weight (g)	Price: 1-100PCS	Comment
	MTV-1.9	1.9	2.0	Fixed	M12*0.5	1/3″	136°	0.4	φ14*14.05	4	$4.7	
	MTV-2.1	2.1	2.0	Fixed	M12*0.5	1/3″	120°	0.4	φ17*18.21	7	$4.6	
	MTV-2.5	2.5	2.0	Fixed	M12*0.5	1/3″	111.8°	0.2	φ14*18.03	6.5	$5.0	
	MTV-2.9	2.9	2.0	Fixed	M12*0.5	1/3″	96°	0.2	φ14*14.7	6.5	$3.5	
	MTV-3.6-C	3.6	2.0	Fixed	M12*0.5	1/3″	80°	0.3	φ14*15.4	4	$1.3	
	MTV-3.7 (Flat cone)	3.7	1.6	Fixed	M12*0.5	1/3″	85°	0.3	φ10.76	4	$3.9	Pinhole
	MTV-3.7 (pointed cone)	3.7	1.6	Fixed	M12*0.5	1/3″	85°	0.3	M12x7.5	4	$3.9	Pinhole
	MTV-4.3	4.3	2.0	Fixed	M12*0.5	1/3″	67°24'	0.3	φ14*15.9	4.2	$2.0	
	MTV-6	6	2.0	Fixed	M12*0.5	1/3″	52°	0.3	φ14*14.8	4.8	$1.5	
	MTV-8	8	2.0	Fixed	M12*0.5	1/3″	36°	0.3	φ14*14.15	3.5	$2.2	
	MTV-12	12	2.0	Fixed	M12*0.5	1/3″	32°48'	0.3	φ14*13.8	3.6	$2.4	
	MTV-16	16	2.0	Fixed	M12*0.5	1/3″	39°42'	0.3	φ14*13.6	4.8	$2.4	
	MTV-25	25	2.0	Fixed	M12*0.5	1/3″	11.6°	0.3	φ16*17.54	7.8	$4.4	

Toptico CCTV Keyboard

Pic show	Model No.	Spec	EXW SZ 50-100	EXW SZ 100-500
	TO-2DK01	With LCD display 2D keyboard Controls 255 cameras at same time Zoom in/out, Iris open/close and focus far/near control User log on/off with passwords Common port: RS485 ,Baud rate: 1,200, 2,400, 4,800, 9,600 and 19,200bps Joystick: 2-axis (L/R, U/D)	$88	86.2
	TO-3DK02	Mini 3D keypad Controller- The World's First Handheld Keypad Controller! Can control the Speed Dome Camera and RS485 OSD Cameras, With the ability to program presets and camera settings by using the on screen display	$60	58.6
	TO-3DK03	Multifunction Handset/desk controller Support simultaneity control for multi High Speed Domes Multi-protocols compatibility 3D Joystick RS485(Max distance) IR Remote control Size : 170X138X110 Weight: 0.92kg	$70	68.5
	TO-2DK05	1).Support control 255 channel cameras 2).Compatible with RS485 3).Easy operation one channel video input, one channel video output, NC interface for coaxNet,peco-D,baud rate 1200,2400,4800,9600optional,2D joystick	$45	44.0
	TO-3DK06	1).Support control 255 channel cameras 2).Compatible with RS485 3).Easy operation one channel video input, one channel video output, NC interface for coax Net, peco-D,baud rate 1200,2400,4800,9600optional,3D joystick	$61	59.7
	TO-3DK09	* Display the current control address's agreement and real time baud rate. * Refurbish the firmware program on line * Maximum sub-control:16 * Completely replace the embedded DVR's panel and remote control's function * Simultaneously control the embedded DVR, speed dome camera and decoder * RS485 control bus, control 255 front end address and connect 128 devices in parallel simultaneously at the most * All input and output communication port use anti-radar design, powerful anti-jamming performance, the standard transmitting distance is 1200 meters * Good communication compatibility, built-in many kinds of agreements * Keyboard operation password on/off/lock function * Key-press warning on/off function * Speed dome camera infinitely variable speed control * LCD display	$91	89.1
	TO-3DK10	3D PTZ Joystick for Pan/Tilt/Zoom Cameras Control PTZ Camera by moving joystick Supports PELCO protocols Works with 2400/4800/9600/19200bps Can run multiple PTZ cameras simultaneously Supports PELCO matrix Back-lit LED displays command menu, protocol, current camera ID, output display ID and joystick status Three axis joystick can control the speed of pan/tilt and lens magnification Multi-protocol and Baud rate can be changed Shortcut key support for common settings such as fixed locations	$72	70.6
	TO-3DK13	*Support DVR protocol and all kinds of matrix. *Support 4 keyboards linkage, each keyboard can support 32pcs domes at most. *Expediently and comfortably use according to ergonomics design. *LCD with back-light can display command menu, protocol, current camera ID, output display ID and joystick status. *Three axis joystick can control speed of pan/tilt and zoom in/out. *Built-in multi-protocols; Baud rate can be selected. *Connect with common security protection equipment and control equipment such as DVR, matrix and picture division equipment etc. *Support all shortcut key of dome to handle. *Alarm trigger and alarm action can be set. *English or Chinese menu can be selected. *Power supply：9V-12V AC/DC *Dimension：378*160*98（mm） *Net weight：1280g Gross weight：1870g	$160	156.8
	TO-PRC20	PTZ Dome Controller IR remote controller: Supports multiple PTZ cameras RS-485 communication Pelco-D Protocol Baud rate: 2400.4800 and 9600Bps. Communication distance: Max.1200M	$15	14.0

Toptico Video balun

1/4/8/16 chanel Passive video Transceiver

Picture	Model No.	Remark	specifications	Unit price USD/pcs 1-50
	PV100A	Push-terminal end 2pcs pack	• Single channel passive video balun • Full motion CCTV video at distances up to 300m when used with any passive transceiver • Up to 1500m with any active UTP video receiver • NTSC, PAL , and SECAM video formats • No power required • 60 dB crosstalk and noise immunity • Compact size and easy installation • Built in transient suppression protection • Frequency response : DC to 8 MHz • Connectors: Male BNC and terminal blocks • Impedance:BNC : 75 ohms , Terminal:50 ohms • Workting Temperature : -20 to +70℃ • Material: ABS Plastic	3.3
	PV100B	IDC connection 2pcs pack		3.7
	PV100C	Push-terminal end 2pcs pack		3.3
	PV100D	Screw-terminal end 2pcs pack		2.8
	PV100E	Screw-terminal end 2pcs pack		2.5
	PV400A	RJ45+Cable	• 4/8/16 channel passive video balun • Full motion CCTV video at distances up to 300m when used with any passive transceiver • Up to 600m with any active UTP video receiver • NTSC, PAL , and SECAM video formats • No power required • 60 dB crosstalk and noise immunity • Compact size and easy installation • Built in transient suppression protection • Frequency response : DC to 8 MHz • Connectors: Male BNC and terminal blocks • Impedance:BNC : 75 ohms , Terminal:50 ohms • Workting Temperature : -20 to +70℃ • Material:high hardness steel rust •stable and durable • Installation: Thumb screws on the rack, unified management	11.5
	PV800A	RJ45+Cable		23.0
	PV1600A	RJ45+Cable		47.2

1/4/8/16 Active Video Transmitter / Receiver

	AV100A	transmitter DIP Type	• 1/4/8/16 Video signal routed via UTP and Rj45. • allows the transmission of real time monochrome or color video over Unshielded Twisted Pair (UTP) telephone wire. • Color video up to 600m with passive transmitter • Color video up to 1200m with active transmitter • NTSC, PAL , and SECAM video formats • 60 dB crosstalk and noise immunity • Compact size and easy installation • Built in transient suppression protection • Frequency response: DC 8MHZ • Impedance: BNC: 75Ω ;RJ45:100Ω • Working temperature: 10℃ to +70℃ • Storage temperature: 30℃ to +70℃ • Active Receiver 12 DC needed 100-240V AC needed,8channels,dual output(16Ch) • Metal outer housing, Dip switch for adjustment • Built in High standard TVS for surge protection	10.4
	AV100B	receiver DIP Type/ dual output		10.4
	AV100C	receiver Knob Type/ dual output		15.0
	AV400A	receiver DIP Type/ dual output		40.3
	AV800A	receiver DIP Type/ dual output		78.2
	AV1600A	receiver DIP Type/ dual output		125.4

Video + Power Transceive

	PVP100R	Passive 2pcs pack	• Power& Video signals are routed via UTP and Rj45 2pcs pack • device that allows the transmission of real time monochrome or color video • color video up to 300M • NTSC, PAL , and SECAM video formats • 60 dB crosstalk and noise immunity • Compact size and easy installation • Built in transient suppression protection • Save cable cost 30% 50% • Frequency response: DC 8MHZ • Impedance: BNC: 75Ω ;RJ45:100Ω • Working temperature: -20 to +70 • Material: ABS Plastic	5.5
	PVP100T			

Video + Power + PTZ Data Transceiver				
	VPD100A	transceiver 2pcs pack	• Single Channel Power +Video+Data Transmiter. • Long Distance Transmission of PAL/NTSC Real time Video. • Transmission of Single Channel Data. • Transmit color video up to 300M •Transmit PTZ data up to 300M •Transmit 12/24V AC/DC Power distance up to 200M •Built in TVS for surge protection • Convenient Wiring, Higher Cable Utilization Rate, Lower Composite Wiring Cost. • Compact Size and Cabinet Installation	6.3
Video, Power, Audio & Data Series				
	VPAD100A	VPAD transmitter	•Transmit color video signal and data control up to 300M/1000ft. •Support power supply on 12V DC work with DC serveror •Support power supply on 24V AC work with AC serveror •RJ45 Connector •Built in TVS for surge protection	12.1
	VPAD400A	Server with 24VAC & 12VDC output	• 4/8/16 Video signal routed via UTP and Rj45 • Transmit video +24V AC power 100M+audio+PTZ data signals • Input power supply is 110V/220V AC,output power supply is 36V AC • Each channel output power supply is 24V AC/12V DC 1A working with • BNC video connector ,RJ45 combination input connector • Built in 4 pcs replaceable module • Built in AC fan	138.0
	VPAD800A	Server with 24VAC & 12VDC output		184.0
	VPAD1600A	Server with 24VAC & 12VDC output		264.5
Coaxial Video Ground Loop Isolator				
	GLI100A	Video Ground Loop Isolator	• Passive,no need for power supply. • Color video up to 300m with passive balun • Color video up to 600m with active receiver • Built in 800V video isolaotor, eliminate interference effectively working with DVR. • Eliminate image distortion,tearing,cross striation and snowflake caused by ground loops. • Passive balun and ground loop isolator intergrated.	6.7
	GLI100B	Isolated Video Balun		7.9

SYSTEM CONNECTION

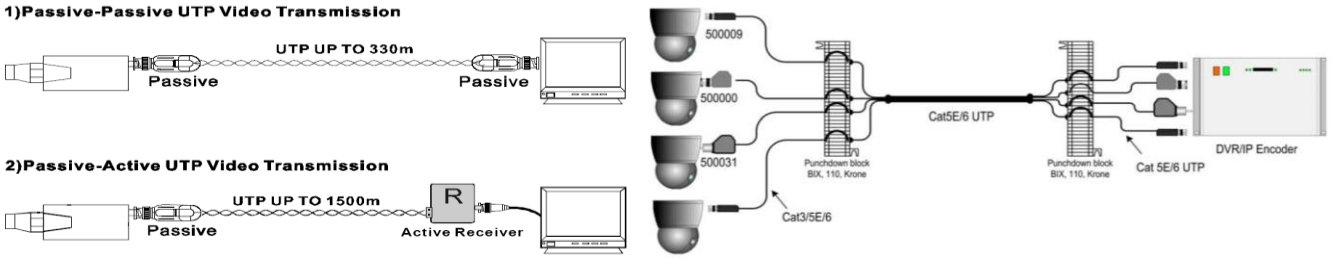

Toptico Cooperation Term

1.FOB SZ By air Price need to charge 140USD Extra
2 Sample is avaialbe to test quality,add 1.5USD/PCS
3.Payment Term: 30%TT+70% Balance before shipment,Western Union is acceptable

Toptico Housing (MOQ 50pcs)

TO-801 TO-801O TO801HB	Type	INDOOR/OUTDOOR
7$$ 8$ 14$	Material	ALUMINIUM
	Color	BEIGE
	Dimension	TO-801:142(W)X115(H)X370(L)mm TO-801O:142(W)X115(H)X310(L)m
	Window	74(L)X63(W)
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	TO-801:1488g TO-801O:1290g
	Packing	12PCS/CTN/3.5' 12PCS/CTN/3'
	Internal Dimension	TO-801:122x102x318mm TO-801O:122x102x256mm
	N.W./G.W.(CTN)	TO-801:11kg/14kg TO-801O:10.5kg/12kg TO801HB:16kg/20kg
	Cubature(CTN)	TO-801:63x43x38.5cm/0.093CBM TO-801O:62x38.5x38.5cm/0.092CBM TO801HB:63x43x38.5cm/0.093C

TO-802A TO-802B TO-802C	Type	INDOOR/OUTDOOR
5.7$	Material	ALUMINIUM
	Color	GREY
	Dimension	TO- 802A: 110(W)X100(H)X390(L)mm TO-802B: 110(W)X100(H)X340(L)mm TO- 802C: 110(W)X100(H)X260(L)mm
	Window	63(L)X58(W)
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER ON:15°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	TO-802A:1200g TO-802B:1100g TO-802C:736g
	Packing	15PCS/CTN/3.2' 15PCS/CTN/2.7' 20PCS/CTN/2.5'
	Internal Dimension	TO-802A:100x85x321mm TO-802B:100x85x271mm TO-802C: 100x85x191mm
	N.W./G.W.(CTN)	TO-802A:184kg/17.5kg TO-802B:12kg/15kg TO-802C:12.4kg/15kg
	Cubature(CTN)	TO-2A:65x40.5x34.5cm /0.09CBM TO-802B:64x36.5x34.5cm/ 0.08CBM TO-802C:65x28.5x46.5cm/ 0.086CBM

TS-803 TS-803HB	Type	INDOOR/OUTDOOR
18$ 24$	Material	ALUMINIUM
	Color	SILVER
	Dimension	145(W)X110(H)X415(L)mm
	Window	84(L)X62(W)
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	1886g
	Packing	8PCS/CTN/3.1'
	Internal Dimension	TO-803：122x104x361mm
	N.W./G.W.(CTN)	TO-803:15kg/17kg TO-803HB:17kg/18kg
	Cubature(CTN)	TO-803:71x48x28cm/0.095CBM TO-803HB:71x48x28cm/0.095CBM

TS-825 / TS826	Type	INDOOR/OUTDOOR
10$ 9.	Material	ALUMINIUM
	Color	BEIGE
	Dimension	154*125*102/ 256*125*102
	Window	76(L)X66(W)
	Input Voltage	DC12V/24~240VAC
	Control Temperature Optional	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	1196g
	Packing	12PCS/CTN/3.3'
	Internal Dimension	TO-804： 107x112x299mm
	N.W./G.W.(CTN)	TO-804:12kg/15kg TO-804HB:15kg/18kg
	Cubature(CTN)	TO-804 :55.5x40x43cm/0.095CBM TO-804HB: 55.5x40x43cm/0.095CBM

TO-805A TO-805A-H	Type	INDOOR/OUTDOOR
10$ 14$	Material	ALUMINIUM
	Color	BEIGE
	Dimension	120(W)X108(H)X410(L)mm
	Window	64(L)X53(W)
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER ON:15°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	1600g
	Packing	12PCS/CTN/2.7'
	Internal Dimension	TO-805A： 95x75x300mm
	N.W./G.W.(CTN)	TO-805A:14kg/17kg TO-805A-H:18kg/20kg
	Cubature(CTN)	TO-805A:53x43x37cm/0.084CBM TO-805A-H:53x43x37cm/0.084CBM

TO-806A	Type	INDOOR/OUTDOOR
10.5	Material	ALUMINIUM
	Color	BEIGE
	Dimension	140(W)X112(H)X400(L)mm
	Window	¢72
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	1532g
	Packing	12PCS/CTN/3.6'
	Internal Dimension	TO-806A： 101x85x300mm
	N.W./G.W.(CTN)	16kg/19.5kg
	Cubature(CTN)	63x43x39.5cm/0.1CBM

TO-806B TO-806H TO-806HB	Type	INDOOR/OUTDOOR
14$ 19$ 18$	Material	ALUMINIUM
	Color	BEIGE
	Dimension	140(W)X112(H)X400(L)mm
	Window	70(L)X70(W)
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	1510g
	Packing	12PCS/CTN/3.6'
	N.W./G.W.(CTN)	TO-806B:16kg/19.5kg TO-806H:19kg/21kg TO-806HB:21kg/23kg
	Cubature(CTN)	TO-806B/TO-806H/TO-806BH:63x43x39.5cm/0.1CBM

TO-807	Type	INDOOR/OUTDOOR
31$	Material	HIPS-PH88
	Color	BEIGE
	Dimension	178(W)X158(H)X400(L)mm
	Window	¢82
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	2500g
	Packing	8PCS/CTN/2.3'
	(with bracket)	housing + bracket ts-609
	N.W./G.W.(CTN)	12kg/14kg
	Cubature(CTN)	50.5x40.5x32cm/0.065CBM

TO-809	Type	INDOOR/OUTDOOR
6.5$	Material	ABS
	Color	BEIGE
	Dimension	100(W)X110(H)X300(L)mm
	Window	¢60
	Input Voltage	DC12V/24~240VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	1020g
	Packing	12PCS/CTN/3.7'
	tO-809	housing(all die casting)
	N.W./G.W.(CTN)	8kg/9kg
	Cubature(CTN)	0.08cbm

TO-815	Type	INDOOR/OUTDOOR
20$	Material	ALUMINIUM
	Color	BEIGE
	Dimension	140X145X410mm
	Window	¢85
	Input Voltage	DC12V/24VAC/110VAC/220VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66,RoHS,WEEE
	Weight	1300g
	Packing	12PCS/CTN/4.4'
	tO-815(new)	housing(bigger inside space)
	Internal Dimension	111x95x304mm
	N.W./G.W.(CTN)	15kg/17kg
	Cubature(CTN)	63x43.5x44.5cm/0.12CBM

TO-816	Type	INDOOR/OUTDOOR
29$	Material	PRESSURE DIE-CAST ALUMINIUM ALLOY
	Color	BEIGE
	Dimension	140(W)X120(H)X395(L)mm
	Window	80(L)X70(W)
	Input Voltage	12VDC/24VAC/110VAC/220VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66
	Weight	1760g
	Packing	12PCS/CTN/3.5'
	tO-816	housing(all die casting)
	N.W./G.W.(CTN)	22kg/25kg
	Cubature(CTN)	62x41x38.5cm/0.098CBM

TO-817	Type	INDOOR
9$	Material	ALUMINIUM
	Color	BEIGE
	Dimension	107X99X240mm
	Window	¢52
	Input Voltage	DC12V/24VAC/110VAC/220VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Certifications	CE,IP66,RoHS,WEEE
	Weight	520g
	Packing	20PCS/CTN/2.3'
	Internal Dimension	76x64x205mm
	N.W./G.W.(CTN)	10kg/13kg
	Cubature(CTN)	56x29x43.5cm/0.07CBM

TO-826	Type	INDOOR/OUTDOOR
34.$	Material	ALUMINIUM
	Color	BEIGE
	Dimension	157×155×428mm
	Window	99X99mm
	Input Voltage	DC12V/24VAC/110VAC/220VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Centifications	CE,IP67,RoHS,WEEE
	Weight	2300g
	Packing	8PCS/CTN/3'
	Internal Dimension	122x128x340mm
	N.W./G.W.(CTN)	18kg/20kg
	Cubature(CTN)	65x45x29.5cm/0.09CBM

TO-830	Type	INDOOR/OUTDOOR
19$	Material	ALUMINIUM
	Color	BEIGE
	Dimension	157×155×428mm
	Window	99X99mm
	Input Voltage	DC12V/24VAC/110VAC/220VAC
	Control Temperature	HEATER BLOWER ON:15°C±3°C ON:35°C±3°C OFF:25°C±3°C OFF:25°C±3°C
	Safety Centifications	CE,IP67,RoHS,WEEE
	Weight	2300g
	Packing	8PCS/CTN/3'
	Internal Dimension	122x128x340mm
	N.W./G.W.(CTN)	18kg/20kg
	Cubature(CTN)	65x45x29.5cm/0.09CBM

Toptico Bracket's (MOQ 50pcs)

TO-629	

Type	INDOOR/OUTDOOR
Mounting Mode	WALL
Material	ALUMINIUM
Color	BEIGE
Dimension	240(H)mm
Max-Load	8kg
Swivel Angle	360°
Weight	1200g
Packing	40PCS/CTN
N.W./G.W.(CTN)	9.6kg/49kg
Cubature (CTN)	500x88x38cm/38CBM

TO-602	

Type	INDOOR/OUTDOOR
Mounting Mode	WALL
Material	ABS
Color	BEIGE
Dimension	160(H)mm
Max-Load	2kg
Swivel Angle	360°
Weight	200g
Packing	50PCS/CTN/2.3'
N.W./G.W.(CTN)	4.2kg/6.8kg
Cubature (CTN)	43x43x34.5cm/0.064CBM

TO-603A TO-603B TO-603C	

Type	INDOOR/OUTDOOR
Mounting Mode	TO-603A,TO-603C:WALL TO-603B:CEILING
Material	ZINC,IRON
Color	GREY
Dimension	TO-603A:145(H)mm TO-603B:265X80mm TO-603C:245(H)mm
Max-Load	3kg
Swivel Angle	360°
Weight	TO-603A:512g TO-603B:628g TO-603C:570g
Packing	20PCS/CTN/1.4'
N.W./G.W.(CTN)	TO-603A:9kg/10kg TO-603B:11kg/13kg TO-603C:11.3kg/12.3kg
Cubature(CTN)	TO-603A:44x29.5x30cm/0.04CBM TO-603B:44x29.5x30cm/0.04CBM TO-603C:44.5x28.5x30.5cm/0.04CBM

TO-604A TO-604B TO-604C TO-604D	

Type	INDOOR/OUTDOOR
Mounting Mode	TO-604A,TO-604C,TO-604D:WALL TO-604B:CEILING
Material	ALUMINIUM
Color	SILVER
Dimension	TO-604A:130mm TO-604B:242X204mm TO-604C:min.305~max.465mm TO-604D:617~1004mm
Max-Load	3kg
Swivel Angle	360°
Weight	TO-604A:328g TO-604B:466g TO-604C:564g TO-604D:808g
Packing	50PCS/CTN/4.1' 16PCS/CTN/4.8' 16PCS/CTN/4.8' 12PCS/CTN/5.7'
N.W./G.W.(CTN)	TO-604A:12kg/18kg TO-604B:5.5kg/9.4kg TO-604C:5.7kg/10.5kg TO-604D:7kg/12kg
Cubature(CTN)	TO-604A:65x27.5x69cm/0.123CBM TO-

TO-604F	

Type	INDOOR/OUTDOOR
Mounting Mode	WALL
Material	ALUMINIUM
Color	SILVER
Dimension	120(H)mm
Max-Load	2kg
Swivel Angle	360°
Weight	140g
Packing	50PCS/CTN/1.8'
N.W./G.W.(CTN)	6kg/8kg
Cubature(CTN)	42.5x42.5x28.5cm/0.05CBM

TO-605A	

Type	INDOOR/OUTDOOR
Mounting Mode	WALL
Material	ALUMINIUM
Color	BEIGE
Dimension	205(H)mm
Max-Load	10kg
Swivel Angle	360°
Weight	528g
Packing	20PCS/CTN/2.3'
N.W./G.W.(CTN)	7.5kg/10kg
Cubature(CTN)	68x25.5x36.5cm/0.063CBM

TO-620	

Type	INDOOR/OUTDOOR
Mounting Mode	WALL
Material	ABS
Color	BEIGE
Dimension	105(H)mm
Max-Load	3kg
Swivel Angle	360°
Weight	70g
Packing	50PCS/CTN/2.3'
N.W./G.W.(CTN)	3.5kg
Cubature(CTN)	68x25.5x36.5cm/0.063CBM

TO-607	

Type	INDOOR
Mounting Mode	WALL
Material	ALUMINIUM
Color	WHITE,BLACK
Dimension	120(H)mm
Max-Load	1kg
Swivel Angle	360°
Weight	90g
Packing	100PCS/CTN/0.8'
N.W./G.W.(CTN)	7.4kg/9.2kg
Cubature(CTN)	49.5x29x16cm/0.023CBM

TO-606A TO-606B	

Type	INDOOR/OUTDOOR
Mounting Mode	WALL
Material	ZINC
Color	SILVER,WHITE,BLACK
Dimension	TO-606A:50(H)mm TO-606B:100(H)mm
Max-Load	1kg
Swivel Angle	360°
Weight	TO-606A:95g TO-606B:128g
Packing	200PCS/CTN/1.3' 100PCS/CTN/1.3'
N.W./G.W.(CTN)	TO-606A:17kg/19.5kg TO-606B:12.4kg/14.7kg
Cubature(CTN)	TO-606A:44.5x28.5x30.5cm/0.04CBM TO-606B:44.5x28.5x30.5cm/0.04CBM

TO-602S	

Type	INDOOR/OUTDOOR
Mounting Mode	WALL
Material	ABS
Color	BEIGE
Dimension	130mm 2kg
Max-Load	360°
Swivel Angle	70g
Weight	50PCS/CTN 11kg/13.3kg
Packing	68x22.5x36.5cm/0.063CBM
N.W./G.W.(CTN)	
Cubature(CTN)	

TO-608	

Type	INDOOR
Mounting Mode	WALL
Material	IRON
Color	SLIVER,BLACK
Dimension	90(H)mm
Max-Load	1kg
Swivel Angle	360°
Weight	90g
Packing	100PCS/CTN/0.8'
N.W./G.W.(CTN)	9kg/11.7kg
Cubature(CTN)	49.5x29x16cm/0.023CBM

TO-609	

Type	INDOOR
Mounting Mode	WALL
Material	ALUMINIUM
Color	BEIGE
Dimension	205(H)mm
Max-Load	10kg
Swivel Angle	360°
Weight	650g
Packing	20PCS/CTN/2.3'
N.W./G.W.(CTN)	11kg/13.3kg
Cubature(CTN)	68x22.5x36.5cm/0.063CBM

TO-622		
	Type	INDOOR/OUTDOOR
	Mounting Mode	WALL
	Material	PRESSURE DIE-CAST ALUMINIUM ALLOY
	Color	BEIGE
	Dimension	170(H)/250/320mm
	Max-Load	10kg
	Swivel Angle	360°
	Weight	450g
	Packing	12PCS/CTN/3'
	N.W./G.W.(CTN)	9.4kg/12kg
	Cubature(CTN)	56x29x43.5cm/0.07CBM

TO-613		
	Type	INDOOR/OUTDOOR
	Mounting Mode	CORNER
	Material	IRON
	Color	BEIGE
	Dimension	170×120×30mm
	Max-Load	10kg
	Weight	820g
	Packing	20PCS/CTN/1.3'
	N.W./G.W.(CTN)	20kg/22kg
	Cubature(CTN)	44.5x28.5x30.5cm/0.04CBM

TO-611		
	Type	INDOOR/OUTDOOR
	Mounting Mode	Pole Mount
	Material	Die-Casting Aluminium
	Color	BEIGE
	Dimension	¢80mm
	Max-Load	2kg
	Packing	15PCS/CTN/1.9'
	N.W./G.W.(CTN)	17.5kg/20.4kg
	Cubature(CTN)	49x23.5x47cm/0.054CBM

TO-612		
	Type	INDOOR/OUTDOOR
	Mounting Mode	CORNER
	Material	IRON
	Color	BEIGE
	Dimension	145×120×110mm
	Max-Load	10kg
	Weight	1400g
	Packing	10PCS/CTN/1.3'
	N.W./G.W.(CTN)	15kg/17kg

TO-618		
	Type	PlaOtic bracket
	Mounting Mode	WALL
	Material	ABS
	Color	BEIGE
	Dimension	160mm
	Max-Load	2kg
	Swivel Angle	360°
	Weight	200g
	Packing	50PCS/CTN/2.2'
	N.W./G.W.(CTN)	3.8kg/6.3kg
	Cubature(CTN)	43x43x34cm/0.063CBM

TO-619		
	Type	DOME BRACKET
	Mounting Mode	WALL
	Material	ALUMINIUM
	Color	BEIGE,SILVER
	Dimension	108×160mm
	Max-Load	2kg
	Swivel Angle	360°
	Weight	450g
	Packing	24PCS/CTN/2.2'
	N.W./G.W.(CTN)	10kg/13.4kg
	Cubature(CTN)	64.5x33x38cm/0.09CBM

Toptico Power Adapter

Pic show	Model No.	Spec	EXW SZ 50-200
	TPA12012D	Actual Power: 120W Input voltage:AC180V~240V 47~63Hz Output Voltage:DC12V 10A N.W : 2500G Product size(mm):L271* W200* H90	$28.2
	TPA24012D	Actual Power: 240W Input voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 20A N.W : 2500G Product size(mm):L271* W200 *H90	$38.9
	TPA2405A	Actual Power: 120W Input voltage:AC110V/220V 50/60HZ Output Voltage:AC24V 5A N.W : 3200G Product size(mm):L271 * W200 * H90	$25.1
	TPA2412A	Actual Power: 288W Input voltage:AC110V/220V 50/60HZ Output Voltage:AC24V 12A N.W : 4500G Product size(mm):L271 * W200 * H90	$40.4
	TPA1209-5A	Actual Power: 60W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 5A Output Voltage apperoach : 01-09=5A N.W : 1390G Product Size(mm):L180*W185*H55	$19.8
	TPA1209-10A	Actual Power: 120W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 10A Output Voltage apperoach : 01-09=10A N.W : 1420G Product Size(mm):L230*W210*H55	$22.9
	TPA1216-12.5A	Actual Power: 150W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 12.5A Output Voltage apperoach : 01-16=12.5A N.W : 1450G Product Size(mm):L300 * W245 * H75	$27.4
	TPA1216-16.5A	Actual Power: 200W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 16.5A Output Voltage apperoach : 01-16=16.5A N.W : 1480G Product Size(mm):L300 * W245 * H75	$35.1
	TPA1216-25A	Actual Power: 300W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 25A Output Voltage apperoach : 01-16=25A N.W : 1520G Product Size(mm):L300 * W245 * H75	$43.4
	TPA2410A	Actual Power: 240W Input Voltage:AC110V/220V 50/60HZ Output Voltage:AC24V 10A N.W : 7220G Product Size(mm):L378* W200 * H90	$53.3
	TPA2415A	Actual Power: 360W Input Voltage:AC110V/220V 50/60HZ Output Voltage:AC24V 15A N.W : 8620G Product Size(mm):L378* W200 * H90	$61.0
	TPA2420A	Actual Power: 480W Input Voltage:AC110V/220V 50/60HZ Output Voltage:AC24V 20A N.W : 9650G Product Size((mm):L378* W200 * H90	$68.6
	TPA2430A	Actual Power: 720W Input Voltage:AC110V/220V 50/60HZ Output Voltage:AC24V 30A N.W : 11510G Product Size(mm):L378* W200 * H90	$83.8

	TPA1215D	Actual Power: 180W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 15A N.W : 5370G Product Size(mm):L378* W200 * H90	$53.3
	TPA1215DC	Actual Power: 180W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 15A (with UPS power interface) N.W : 5370G Product Size(mm):L378* W200 * H90	$61.0
	TPA1225D	Actual Power: 300W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 25A N.W : 5520G Product Size(mm):L378* W200 * H90	$68.6
	TPA1230D	Actual Power: 360W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 30A N.W : 5790G Product Size(mm):L378* W200 * H90	$83.8
	TPA1111	Actual Power: 12W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 1A N.W : 100G Product Size(mm):L73 * W49.8 * H30	$2.4
	TPA1115	Actual Power: 12W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 1.5A N.W : 100G Product Size(mm):L73 * W49.8 * H31	$3.5
	TPA2005	Actual Power: 10W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC5V 2A N.W : 170G Product Size(mm):L73 * W49.8 * H30	$2.6
	TPA2009	Actual Power: 13.5W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC9V 1.5A N.W : 150G Product Size(mm):L73 * W48 * H26	$2.4
	TPA2513	Actual Power: 24W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 2A N.W : 1805G Product Size(mm):L99 * W49 * H33	$3.8
	TPA3013	Actual Power: 36W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 3A N.W : 250G Product Size(mm):L115 * W50 * H31	$4.9
	TPA4013	Actual Power: 48W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 4A N.W : 250G Product Size(mm):L113 * W54 * H33	$5.3
	TPA5013	Actual Power: 60W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 5A N.W : 251G Product Size(mm):L123 * W57 * H32	$6.1
	TPA6013	Actual Power: 72W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 6A N.W : 325G Product Size(mm):L123 * W57 * H32	$7.5
	TPA9013	Actual Power: 102W Input Voltage:AC90V~264V 47~63Hz Output Voltage:DC12V 8A N.W : 451G Product Size(mm):L180 * W71 * H41	$12.2

Toptico CCTV Tester Monitor

Pic show	Model No.	Spec	EXW SZ 50-100	EXW SZ 100-500
	TCTM01	* 2.5 inch TFT-LCD Monitor, DC 12V power output, PTZ Controller, Video Level test, Video signal generator, UTP cable tester, PTZ data capture. * Resolution: 960x240 pixels. * Support more than 10 kinds of protocol. * More than 8 hours working time with Li-polymer battery. * Powerful in testing LAN cable, measuring the connecting status and displaying the seq connection. * 1 Channel BNC video input, 1 Channel BNC video output. * PAL/NTSC system auto adaptable. * Dimension : 165x104x43mm.	$106	$103
	TCTM02 Supply power to camera		$114	$112
	TCTM03	3.5'TFT-LCD Video test,Video level test,PTZ controller Colorbar generator UTP cable test PTZ data analysis PTZ address scan Operating time 12 hour Audio input test DC12/1A power output	$149	$146
	TCTM04	Combine the video test, **Digital Multi-meter**, PTZ controller, video signal level test, NTSC/PAL color pattern generator, UTP cable test, PTZ protocol analysis, PTZ address scan, DC12 1A output, Audio test to one body. * 3.5"TFT-LCD , 960（H）×240（V）resolution * Digital Multimeter, performs AD/DC Voltage, AC/DC Current, Resistor, Conductivity, Capacitor and Diode test. * Adjustable brightness, contrast, color of LCD * NTSC and PAL auto apapted. * PTZ address scanning, search up the ID of PTZ camera. * Support RS232 and RS485 interface, the rate 150-19200bps * 3.7V DC3000mAh Li-polymer battery, more reliable, and work 15 hours. *Dimension : 170x99x48mm.	$193	$189
	TCTM05	**Eleven-in-One CCTV security tester** Combine the video test, **The Fiber Optical Power Meter, Digital Multi-meter,** PTZ controller, video signal level test, NTSC/PAL color pattern generator, UTP cable test, PTZ protocol analysis, PTZ address scan, DC12 1A output, Audio test to one body. * 3.5"TFT-LCD , 960（H）×240（V）resolution * Optical power meter, testing the laser power of Video Fiber Optic Transmission equipment, and testing the Fiber Optic Patch Cord , etc. * Digital Multimeter, performs AD/DC Voltage, AC/DC Current, Resistor, Conductivity, Capacitor and Diode test. * Adjustable brightness, contrast, color of LCD * PAL / NTSC auto adapted. * Colorbar Video signal generator, transmit/receive colorful images * Support more than twenty kinds of PTZ controller protocols. For example, PELCO-P, PELCO-D. * Support RS232 and RS485 , the baud rate 150-19200bps * Powerful in testing LAN cable, measuring the connecting status and displaying the sequence of connection * PTZ(P/L & Zoom) Control: Control the status of P/L, zoom in/out the camera, adjust the aperture, foci and setting parameters, run and call the preset. * 3.7V DC3000mAh Li-Polymer Battery, more reliable, and work 15 hours. * Dimension : 165x104x43mm.	$303	$296
	TCTM06	Screen: TFT 3.5 inch Resolution 320 * 240 Case Material ABS Battery Lithium battery DC8.4V (2000mA * 2 section which has been loaded machine) Machine Power ≤1.5WAccording to open the different functions Chargers: Input AC100-220V / Output 8.4V / 1A Video input format PAL/ NTSC Video Output 1.0Vp-p PTZ Control Protocol PELCO-D、PELCO-P、SAE、YAAN Baud 1200bps、2400bps、9600bps、19200bps Data Interface RS485、RS232 Temperature -10℃~+50℃	$132	$129
	TCTM07	Screen: TFT 3.5 inch, Resolution 320*240 Shell materials: Engineering ABS plastic Surface treatment: Polyester wadding(elastic paint) Battery: 18650 lithium battery DC3.7V (2200mA is set into the mechine) Machine power consumption: ≤ 0.8W (12V emergency power does not open) Charger: 5V / 1000MA Video input standard: PAL/ NTSC 1.0Vp-p Emergency power output: 12V/0.5A Audio Input: 0.7 Vp-p Automatic sleep:3 minutes Operating Temperature:5 ℃ ~ +50 ℃ Size:92MM * 73MM * 27MM (shade cover part is 40MM) Weight:120g Machine gross weight: 500g	$48	$47

Toptico Cable & Conector

	DC Cable Price: 0.2$ DC Diameter:φ5.5*2.1mm		DC Cable Price: 0.2$ DC Diameter:φ5.5*2.1mm
	DC-DC 4CH splitter Total length: 34cm MOQ: 1K Exw SZ: 1.7$ Less 1K Price : 1.9$ Round cable		DC-DC 8CH splitter Total length: 34cm MOQ: 1K Exw SZ: 2.9$ Less 1K Price : 3.1$ Round cable
	Microphon Length 0.25m: 2.5$ Length 0.5m: 3.2$		**Microphon** Length:0.5m: 2.9$

	$0.23		$0.20		$0.22
	$0.21		$0.38		$0.20
	$0.39		$0.43		$0.39
	Bi-directional RS232<=>RS485 converter; 1 channel RS485 output; Half-duplex signals transmission; Up to 1200 meters communication distance; 0-115200 bps transmission speed; Static resistant.				$2.85

CCTV Cable					EXW SZ price
	Coaxial cable (RG 59) Conductor:0.75BC, Insulator Nom Dia.(mm):Solid PE 4.8mm DC x2 0.5 Shielding:1.Al Foil 2. Braiding 128/0.10 BC Jacket (mm): Black PVC 7.0 With CE (Chinese famous cable)				USD $20/100M MOQ: 100Pcs
 1BNC+1DC to 1BNC+1DC	5M	$2.2	 1BNC+1RCA+1DC to 1BNC+1RCA+1DC with Audio	5M	$3.1
	10M	$2.9		10M	$3.6
	15M	$3.6		15M	$4.4
	20M	$4.6		20M	$5.4
	25M	$5.8		25M	$7.0
	30M	$7.0		30M	$8.3
	35M	$7.9		35M	$9.3
	40M	$8.9		40M	$10.3
	50M	$11.3		50M	$13.2
	100M	$24.2		100M	$30.9